

EOG Resources, Inc.
P.O. 1910
Vernal, UT 84078

September 2, 2005

Utah Division of Oil, Gas, & Mining
1594 West North Temple, Suite 1210
P.O. Box 145801
Salt Lake City, UT 84114-5801

RE: APPLICATION FOR PERMIT TO DRILL
NORTH CHAPITA 293-28
SE/NE, SEC. 28, T8S, R22E
UINTAH COUNTY, UTAH
LEASE NO.: U-059
UTE INDIAN TRIBAL LANDS

Enclosed please find a copy of the Application for Permit to Drill and associated attachments for the referenced well.

Please address further communication regarding this matter (including approval) to:

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Phone: (435)789-4120
Fax: (435)789-1420

Sincerely,



Ed Trotter
Agent
EOG Resources, Inc.

Attachments

RECEIVED

SEP 13 2005

DIV. OF OIL, GAS & MINING

N. Chapita 293-28 B

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. U-059
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input checked="" type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name UTE INDIAN TRIBE
2. Name of Operator EOG RESOURCES, INC.		7. If Unit or CA Agreement, Name and No.
3a. Address P.O. BOX 1815 VERNAL, UT 84078		8. Lease Name and Well No. NORTH CHAPITA 293-28
3b. Phone No. (Include area code) (435)789-0790		9. API Well No. 43-047-32135
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 1735' FNL, 850' FEL At proposed prod. Zone 633144X 40.097108 SE/NE 4439494Y 109.438062		10. Field and Pool, or Exploratory NATURAL BUTTES
11. Sec., T., R., M., or Blk. and Survey or Area SEC. 28, T8S, R22E, S.L.B.&M.		12. County or Parish UINTAH
13. State UTAH		14. Distance in miles and direction from nearest town or post office* 33.5 MILES SOUTHEAST OF VERNAL, UTAH
15. Distance from proposed* location to nearest property or lease line, ft. 850' (Also to nearest drig. Unit line, if any)	16. No. of Acres in lease 880	17. Spacing Unit dedicated to this well 40
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See Topo Map C	19. Proposed Depth 10,675'	20. BLM/BIA Bond No. on file NM-2308
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4910.3 FEET GRADED GROUND	22. Approximate date work will start* UPON APPROVAL	23. Esti mated duration 45 DAYS
24. Attachments		


Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 	Name (Printed/Typed) Ed Trotter	Date September 2, 2005
--	---	----------------------------------

Title
Agent

Approved by (Signature) 	Name (Printed/Typed) BRADLEY G. HILL ENVIRONMENTAL MANAGER	Date 06-05-08
Title Agent	Office	RECEIVED SEP 13 2005

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of Approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

**Federal Approval of this
Action is Necessary**


Well location, NORTH CHAPITA #293-28, located as shown in the SE 1/4 NE 1/4 of Section 28, T8S, R22E, S.L.B.&M. Uintah County, Utah.

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UINTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.




THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM
FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY
SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE
BEST OF MY KNOWLEDGE AND BELIEF.



UTAH ENGINEERING LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 09-27-04	DATE DRAWN: 10-15-04
PARTY B.B. T.H. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

T8S, R22E, S.L.B.&M.

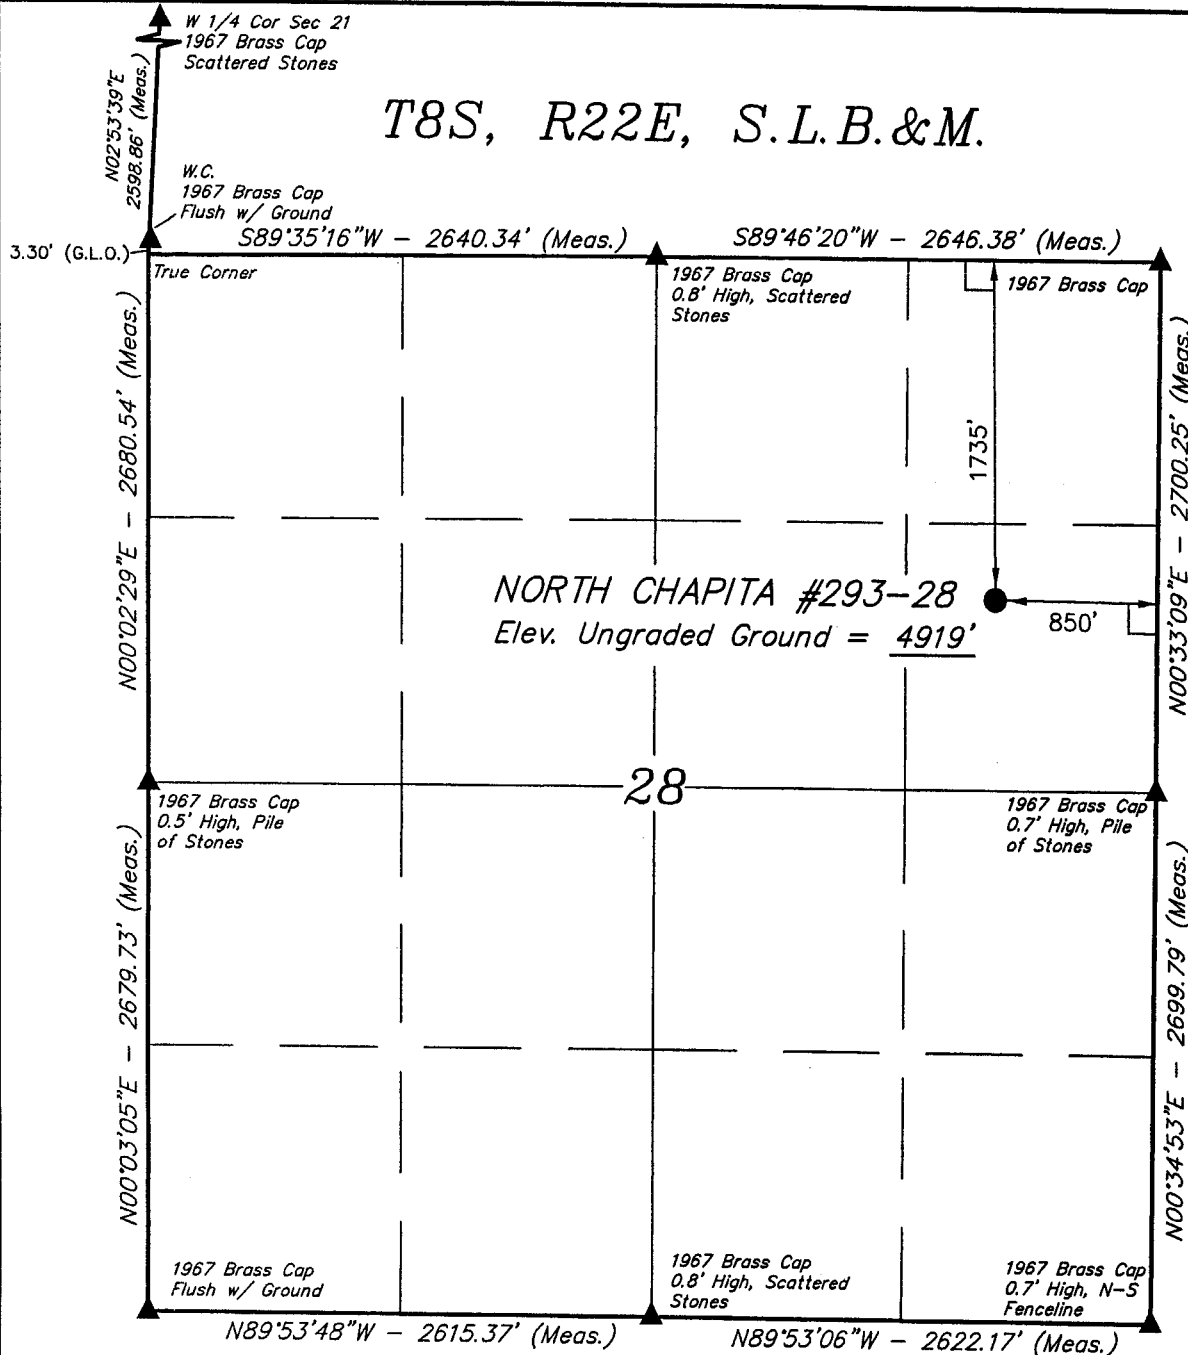

L = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)

LATITUDE = 40°05'49.74" (40.097150)
LONGITUDE = 109°26'19.43" (109.438731)

(NAD 27)

LATITUDE = 40°05'49.87" (40.097186)
LONGITUDE = 109°26'16.96" (109.438044)

EIGHT POINT PLAN

NORTH CHAPITA 293-28 SE/NE, SEC. 28, T8S, R22E, S.L.B.&M. UINTAH COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	DEPTH (KB)
Green River	2,361'
Wasatch	5,448'
Chapita Wells	6,105'
Buck Canyon	6,790'
North Horn	7,176'
Island	7,901'
KMV Price River	8,547'
KMV Price River Middle	9,203'
KMV Price River Lower	10,049'
Sego	10,532'

EST. TD: 10,675'

Anticipated BHP 4600 PSI

3. PRESSURE CONTROL EQUIPMENT: A 5M BOP will be used on the Production Hole only. (See attached BOP Diagram), Pressure Control Equipment will not be used on the Surface Hole.

4. CASING PROGRAM:

<u>HOLE SIZE</u>	<u>INTERVAL</u>	<u>LENGTH</u>	<u>SIZE</u>	<u>WEIGHT</u>	<u>GRADE</u>	<u>THREAD</u>	<u>MINIMUM SAFETY FACTOR</u>		
							<u>COLLAPSE</u>	<u>BURST</u>	<u>TENSILE</u>
20"	0' - 45' +/- GL	45' +/-	13 3/8"	48.0 #	H-40	ST&C	770 PSI	1730 PSI	322,000#
12 1/4"	45' - 2300' +/- KB	2300' +/-	9 5/8"	36.0 #	J-55	ST&C	2020 PSI	3520 PSI	394,000#
7 7/8"	2300' - TD +/- KB	10,675' +/-	4 1/2"	11.6 #	P-110	LT&C	7560 PSI	10,710 PSI	284,000#

The 12 1/4" Intermediate hole will be drilled to a total depth of 300' below the base of the Green River lost circulation zone and 9 5/8" casing will be set to that depth. Actual setting depth of the 9 5/8" casing may be less than 2300' in this well.

All casing will be new or inspected.

5. Float Equipment:

CONDUCTOR HOLE PROCEDURE (0-45' Below GL):

None

SURFACE HOLE PROCEDURE (45' - ±2300'):

Guide Shoe

Insert Float Collar (PDC drillable)

Cents.: 1-5' above shoe, top of jts. #2 and #3 then every 5th joint to surface.

PRODUCTION HOLE PROCEDURE ±2300'-TD:

FS, 1 joint of casing, FC, and balance of casing to surface.

EIGHT POINT PLAN
NORTH CHAPITA 293-28
SE/NE, SEC. 28, T8S, R22E, S.L.B.&M.
UINTAH COUNTY, UTAH

6. MUD PROGRAM

CONDUCTOR HOLE PROCEDURE (0-45' Below GL):

Dry or light mud as needed to support drilling by Bucket Rig.

SURFACE HOLE PROCEDURE (45' - ±2300'):

Air, Air Mist and Water (circulate through reserve pit) with Gel/LCM sweeps.

PRODUCTION HOLE PROCEDURE ±2300'-TD:

Drilling Fluid:

DEPTH	MUD WT.	VIS	PV	YP	GELS	PH	FLUID LOSS	LGS	DAP
feet	ppg	sec	cp	lb/100ft ²	@ 120°		ml	%	ppb
2,700' - 4,685'	8.4-8.5	28 -32	1 -3	0 -2	N/C	8.5-9.0	N/C	<2	N/C
4,685' - 8,910'	8.5-9.0	30 -34	2 -5	1 -2	N/C	8.5-9.5	<40	<3	N/C
8,910' - 10,325'	9.0-11.0	40 -44	8 -14	8 -12	<6/<20	9.0-9.5	10 -20	<6	N/C

7. VARIANCE REQUESTS:

- A. EOG Resources, Inc. requests a variance to regulations requiring a straight run blooie line (Where possible, a straight run blooie line will be used).
- B. EOG Resources, Inc. requests a variance to regulations requiring an automatic ignitor or continuous pilot light on the blooie line. (Not required on aerated water system).
- C. EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. To reduce location excavation, the blooie line will be 75' in length.

8. EVALUATION PROGRAM:

Logs: No Open Hole Logs.
Cased Hole Logs will to run

EIGHT POINT PLAN
NORTH CHAPITA 293-28
SE/NE, SEC. 28, T8S, R22E, S.L.B.&M.
UINTAH COUNTY, UTAH

9. CEMENT PROGRAM:

CONDUCTOR HOLE PROCEDURE (0-45' Below GL):

Cement to surface with Redi-Mix cement

SURFACE HOLE PROCEDURE (45'-2300'+/-):

Option #1: Well circulates or drills with air.

Tail: 500' of Class 'G' mixed at 15.8 ppg w/ 2% CaCl₂ & 0.25 pps Flocele + 35% Excess or Type 5 Cement mixed at 15.6 ppg w/ 2% CaCl₂ & 0.25 pps Flocele + 35% Excess.

Lead: Hi-Fill Cement mixed at 11 ppg with 16% Gel, 10#/sx Gilsonite, 3% salt, 3#/sx GR-3 and 0.25 #/sx Flocele plus 35% Excess to get cement returns to surface.

Option #2: Well does not circulate.

Class 'G' cement mixed at 15.8 ppg w/ 2% CaCl₂ & 0.25 pps Flocele + 35% Excess or Type % 5 Cement mixed at 15.6 ppg w/ 2% CaCl₂ & 0.25 pps Flocele + 35% Excess to 100' above the lost circulation zone and top out with same with 3-4% CaCl₂ to get cement returns to surface.

PRODUCTION HOLE PROCEDURE 2300'-TD:

Lead: 500 sks 35:65 Poz G w/ 4% D20 (Bentonite), 2% D174 (Extender), 0.2% D65 (Dispersant), 0.2% D46 (Antifoam), 0.75% D112 (Fluid Loss Additive), 0.15% D13 (Retarder), 0.25 pps D29 (cello flakes), mixed at 13.0 ppg, 1.73 cu. ft./sk., 9.06 gps water

Tail: 1700 sks: 50:50 Poz G w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.15% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 cu. ft./sk., 5.9 gps water.

10. ABNORMAL CONDITIONS:

SURFACE HOLE (45'-2300')

Potential Problems: Lost circulation below 1800' and minor amounts of gas may be present.

PRODUCTION HOLE 2300'-TD

Potential Problems: Sloughing shales and key seat development are possible in the Wasatch Formation. CO₂ contamination in the mud is possible in the Price River (Mesa Verde).

EIGHT POINT PLAN
NORTH CHAPITA 293-28
SE/NE, SEC. 28, T8S, R22E, S.L.B.&M.
UINTAH COUNTY, UTAH

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring

12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.


(Attachment: BOP Schematic Diagram)

5000 PSIG DIAGRAM

ANNULAR PREVENTOR AND BOTH RAMS ARE 5000 PSIG RATED.
CASING FLANGE IS 11" 5000 PSIG RATED.
BOPE 11" 5000 PSIG

TESTING PROCEDURE:

1. BOPE's will be tested with a professional tester to conform to Onshore Order #2 with retest every 14 days.
2. Blind & Pipe rams will be tested to rated working pressure, 5000 psig.
3. Annular preventor will be tested to 50% of working pressure, 2500 psig.
4. Casing will be tested to 0.22 psi/ft. or 2500 psig. Not to exceed 70% of burst strength, whichever is greater.
5. All lines subject to well pressure will be pressure-tested to the same pressure as blind & pipe rams.
6. All BOPE specifications and configurations will meet Onshore Order #2 requirements for 5000 psig BOPE specifications.

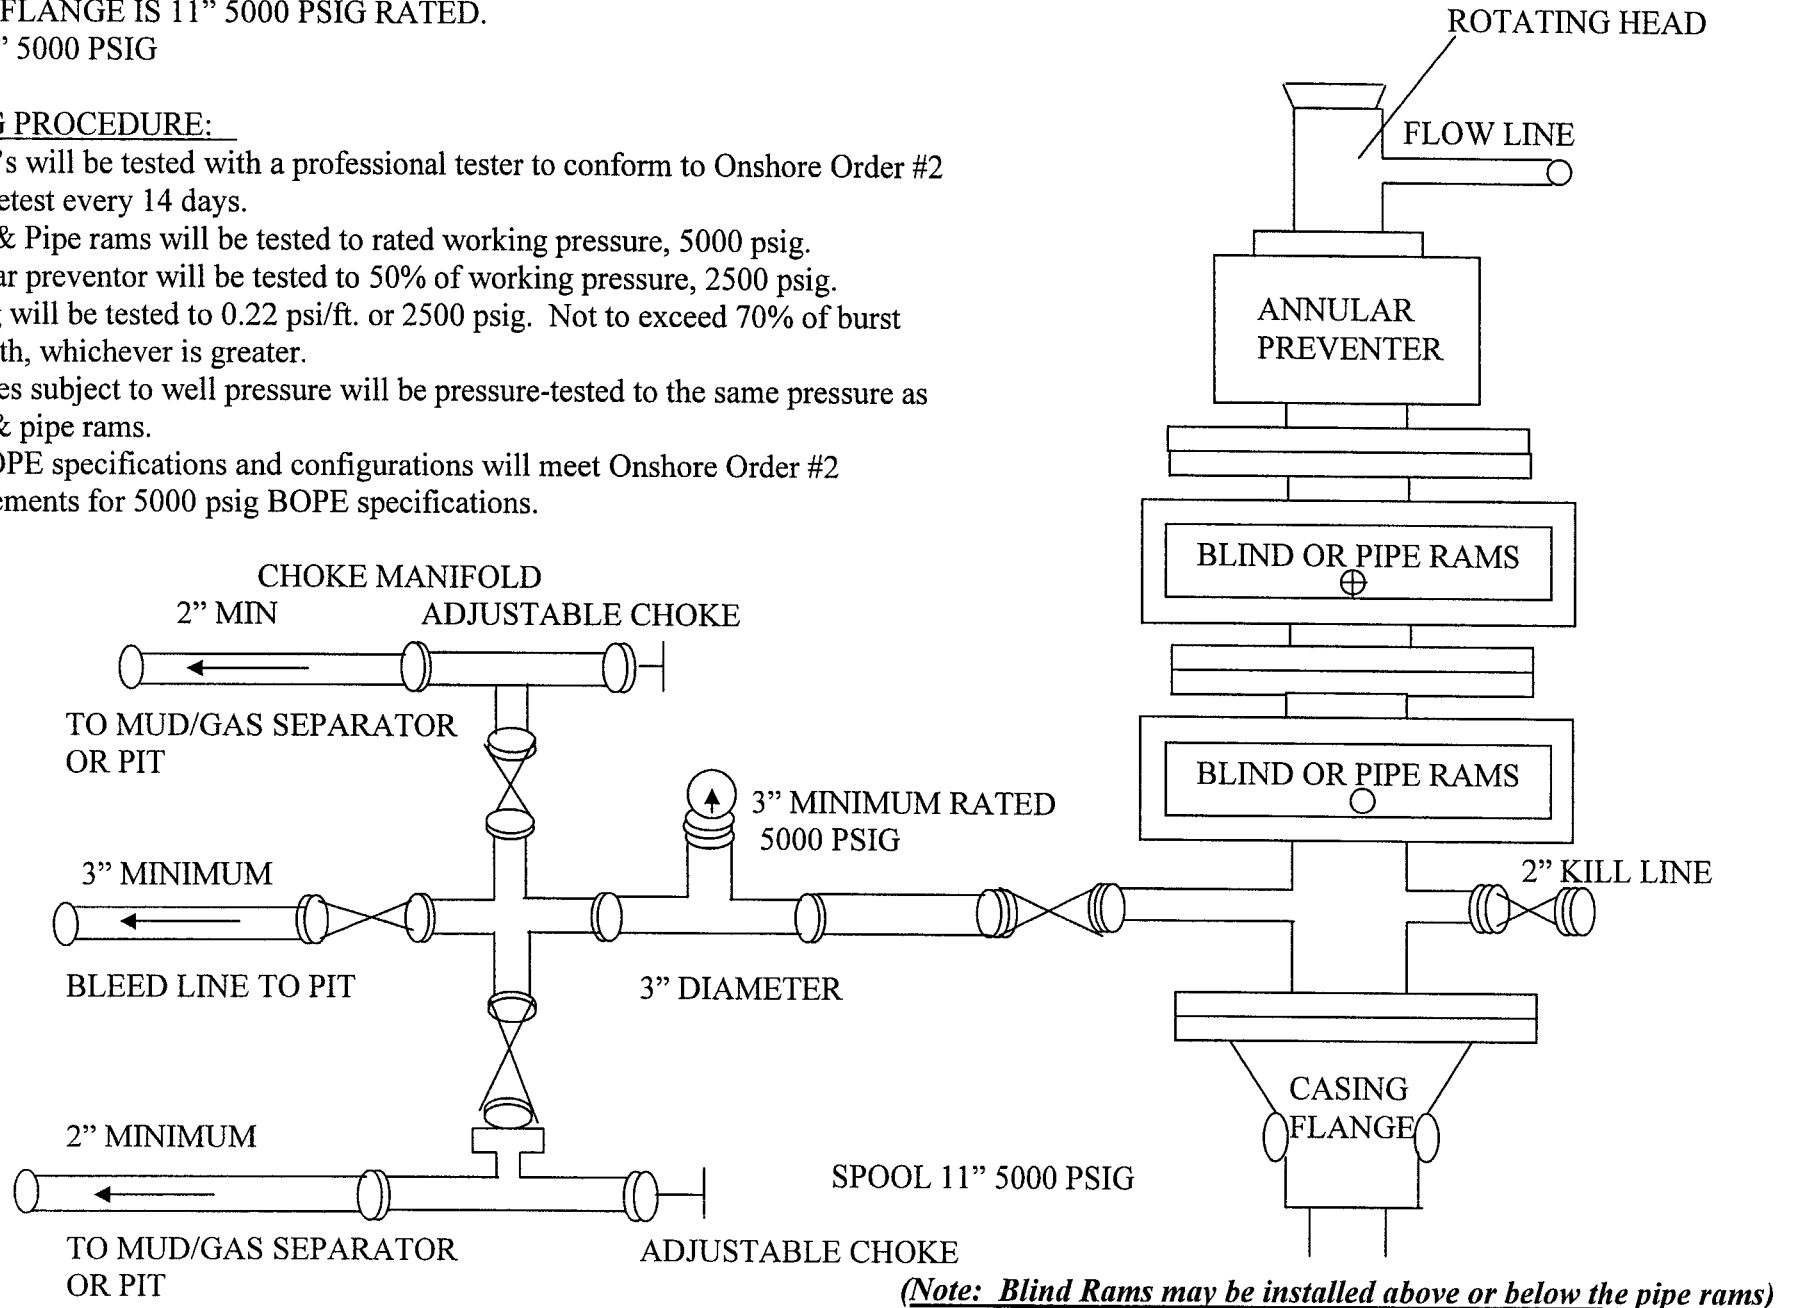

**CONDITIONS OF APPROVAL
FOR THE SURFACE USE PROGRAM OF THE
APPLICATION FOR PERMIT TO DRILL**

Company/Operator:	<u>EOG Resources, Inc.</u>
Well Name & Number:	<u>North Chapita 293-28</u>
Lease Number:	<u>U-059</u>
Location:	<u>1735' FNL & 850' FEL, SE/NE, Sec. 28, T8S, R22E, S.L.B.&M., Uintah County</u>
Surface Ownership:	<u>Ute Indian Tribe</u>

NOTIFICATION REQUIREMENTS

Location Construction - forty-eight (48) hours prior to construction of location and access roads.

Location Completion - prior to moving on the drilling rig.

Spud Notice: - at least twenty-four (24) hours prior to spudding the well.

Casing String and
Cementing - twenty-four (24) hours prior to running casing and cementing all casing strings.

BOP and related
Equipment Tests - twenty-four (24) hours prior to running casing and tests.

First Production
Notice - within five (5) business days after new Well begins or production resumes after Well has been off production for more than ninety (90) days.

For more specific details on notification requirements, please check the Conditions of Approval for Notice to Drill and Surface Use Program.

THIRTEEN POINT SURFACE USE PROGRAM

1. EXISTING ROADS

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 33.5 miles southeast of Vernal, Utah - See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary. No off lease Right-of-Way will be required.

2. PLANNED ACCESS ROAD

- A. The access road will be approximately 0.1 miles in length. See attached TOPO Map "B".
- B. The access road has a 30 foot ROW w/ 18 foot running surface.
- C. Maximum grade on access road will be 8%.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No culverts, bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined - flagged at time of location staking.

All travel will be confined to existing access road Right-of-Way.
Access roads and surface disturbing activities will conform to standards outlined in the Bureau of Land Management and Forest Service Publication: Surface Operating Standards For Oil & Gas Exploration and Development, (1989).

The road shall be upgraded to meet the standards of the anticipated traffic flow and all-weather road requirements. Upgrading shall include ditching, drainage, graveling, crowning, and capping the roadbed as necessary to provide a well-constructed safe road. Prior to upgrading, the road shall be cleared of any snow cover and allowed to dry completely. Traveling off the 30 foot Right-of-Way will not be allowed.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of

drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

3. **LOCATION OF EXISTING WELLS WITHIN A ONE MILE RADIUS OF PROPOSED WELL LOCATION**

A. Producing wells - 4*

(*See attached TOPO map "C" for location)

4. **LOCATION OF EXISTING AND/OR PROPOSED FACILITIES**

A. **ON WELL PAD**

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of well head valves, separator, dehy, 210 Bbl condensate tank, meter house, and attached piping.
2. Gas gathering lines - A 4" gathering line will be buried from dehy to the edge of the location.

B. **OFF WELL PAD**

1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
2. A 4" OD steel above ground natural gas pipeline will be laid approximately 1192' from proposed location to a point in the SW/NE of Section 28, T8S, R22E, where it will tie into Questar Pipeline Co.'s existing line. Proposed pipeline crosses BIA administered lands, thus a Right-of-Way grant will be required.
3. Proposed pipeline will be a 4" OD steel, welded line laid on the surface.
4. Protective measures and devices for livestock and wildlife will be taken and/or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

The production facilities will be placed on the East side of the location.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities required will be painted within 6 months of installation. Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

The required paint color is Carlsbad Canyon.

If at any time the facilities located on public land and authorized by the terms of the lease are no longer included in the lease (due to a construction in the unit or other lease or unit boundary change), the BIA will process a change in authorization to the appropriate rental or other financial obligation as determined by the authorized officer.

5. LOCATION & TYPE OF WATER SUPPLY

- A. Water supply will be from the Ouray Brine Plant at Ouray, Utah, and/or Target Trucking Inc.'s water source in the SW/SW, Sec. 35, T9S, R22E, Uintah County, Utah (State Water Right #49-1501). Produced water from the Chapita Wells and Stagecoach Units will also be used.
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIAL

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. All construction material will come from Tribal Land.
- C. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah County landfill.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following three locations: Natural

Buttes Unit 21-20B SWD, Ace Disposal, or EOG Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or be removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

On BIA administered land:

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with a plastic liner. A felt liner will also be installed if rock is encountered during pit construction.

8. **ANCILLARY FACILITIES**

- A. No airstrips or camps are planned for this well.

9. **WELLSITE LAYOUT**

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the Northwest corner of the location. The flare pit will be located downwind of the prevailing wind direction on the North side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled topsoil will be stored between Corners #6 and #7.

Access to the well pad will be from the Southwest.

Corners #6 & #8 will be rounded off to minimize excavation.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence).
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off the location. Pits will be fenced and maintained until cleanup.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BIA or SMA specifications. A cattleguard with an adjacent 16-foot gate shall be installed in any fence where a road is to be regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently mounted on concrete bases. Prior to crossing any fence located on Tribal land, or any fence between Tribal land and private land, the operator will contact the BIA, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RESTORATION OF SURFACE

A. PRODUCING LOCATION

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 12 months from the date of well completion. Before any dirt work takes place, the reserve pit will be

completely dry and all cans, barrels, pipe, fluid, and hydrocarbons, will be removed.

Contact appropriate surface management agency for required seed mixture.

B. DRY HOLE/ABANDONED LOCATION

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BIA will attach the appropriate surface rehabilitation conditions of approval.

11. SURFACE OWNERSHIP

Access road: Tribal

Location: Tribal

12. OTHER INFORMATION

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the AO. Within five working days the AO will inform the operator as to:

- whether the materials appear eligible for the National Register of Historic Places;
- the mitigation measures the operator will likely have to undertake before the site can be used.
- a time frame for the AO to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the AO are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the AO will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs.

The AO will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the AO that required mitigation has been completed, the operator will then be allowed to resume construction.

B. As operator, EOG Resources, Inc. will control noxious weeds

along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BIA, or the appropriate County Extension Office. On BIA administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.

- C. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.
- D. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on Tribal Lands after the conclusion of drilling operations or at any other time without BIA authorization. However, if BIA authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage on commercial facilities. (The BIA does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

Additional Surface Stipulations

None

LESSEE'S OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION

PERMITTING AGENT

Ed Trotter
P.O. Box 1910
Vernal, UT 84078
Telephone: (435)789-4120
Fax: (435)789-1420

DRILLING OPERATIONS

Donald Presenkowski
EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
Telephone: (307)276-4865

All lease or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approval plan of operations, and any applicable Notice to Lessees. EOG Resources, Inc. is fully responsible for the actions of their subcontractors. A copy of these conditions will be furnished to the field representative to insure compliance.

A copy of the approved APD and ROW grant, if applicable, shall be on location during construction of the location and drilling activities.


The BIA office shall be notified upon site completion prior to moving on the drilling rig.

Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions that presently exist; that the statements made in the Plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this Plan and the terms and conditions under which it is approved.

Please be advised that EOG Resources, Inc. is considered to be the operator of the **North Chapita 293-28 Well, located in the SE/NE of Section 28, T8S, R22E, Uintah County, Utah; Lease #U-059;** and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is provided under Bond #NM 2308.

9-2-2005
Date


Agent

EOG RESOURCES, INC
NORTH CHAPITA #293-28
SECTION 28, T8S, R22E, S.L.B.&M.

PROCEED IN AN EASTERLY, THEN SOUTHERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 3.9 MILES TO THE JUNCTION OF STATE HIGHWAY 45; EXIT RIGHT AND PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 19.2 MILES ON STATE HIGHWAY 45 TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTHWEST; TURN RIGHT AND PROCEED IN A SOUTHWESTERLY DIRECTION APPROXIMATELY 9.9 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE SOUTH; TURN LEFT AND PROCEED IN A SOUTERLY DIRECTION APPROXIMATLEY 100' TO THE BEGINNING OF THE PROPOSED ACCESS TO THE NC #233-28 TO THE SOUTHEAST; FOLLOW ROAD FLAGS IN A SOUTHEASTERLY, THEN SOUTHWESTERLY DIRECTION APPROXIMATELY 0.4 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHEAST; FOLLOW ROAD FLAGS IN A SOUTHEASTERLY DIRECTION APPROXIMATLEY 0.1 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 33.5 MILES.

EOG RESOURCES, INC.
NORTH CHAPITA #293-28
LOCATED IN UINTAH COUNTY, UTAH
SECTION 28, T8S, R22E, S.L.B.&M.

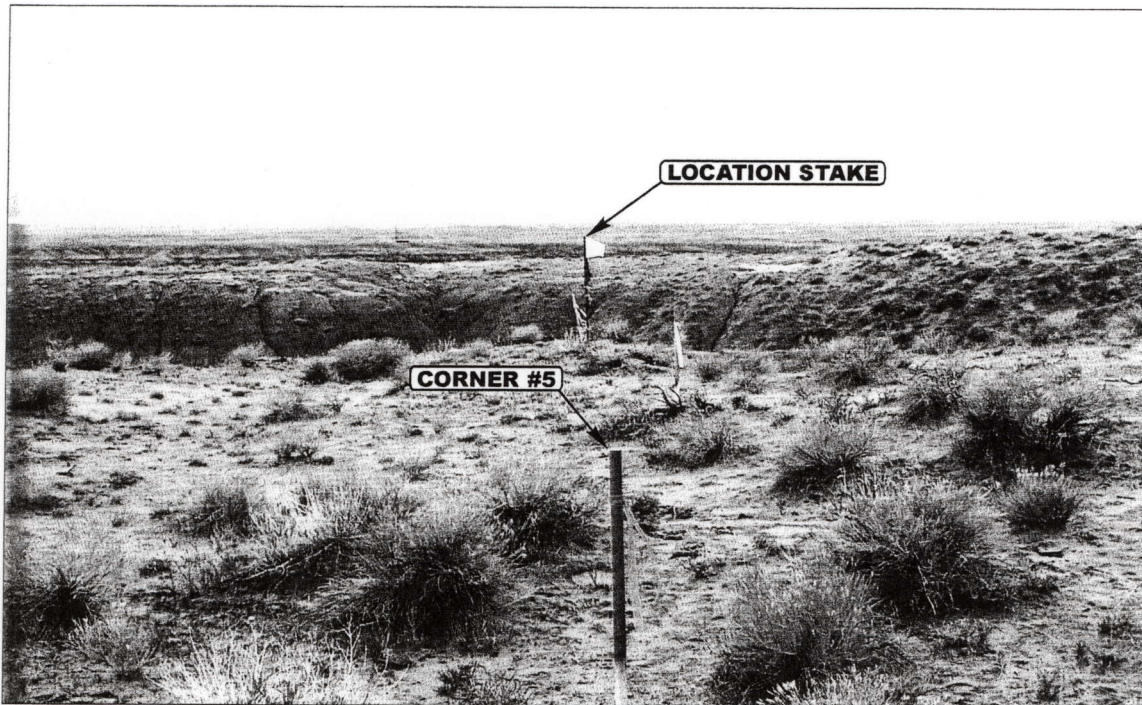


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: SOUTHERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHEASTERLY



- Since 1964 -


UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS			10	01	04	PHOTO
			MONTH	DAY	YEAR	
TAKEN BY: B.B.		DRAWN BY: L.K.		REVISED: 00-00-00		

EOG RESOURCES, INC.

LOCATION LAYOUT FOR


NORTH CHAPITA #293-28
SECTION 28, T8S, R22E, S.L.B.&M.
1735' FNL 850' FEL



SCALE: 1" = 50'
DATE: 10-21-04
Drawn By: D.R.B.

NOTE:

Flare Pit is to be located a min. of 100' from the Well Head.

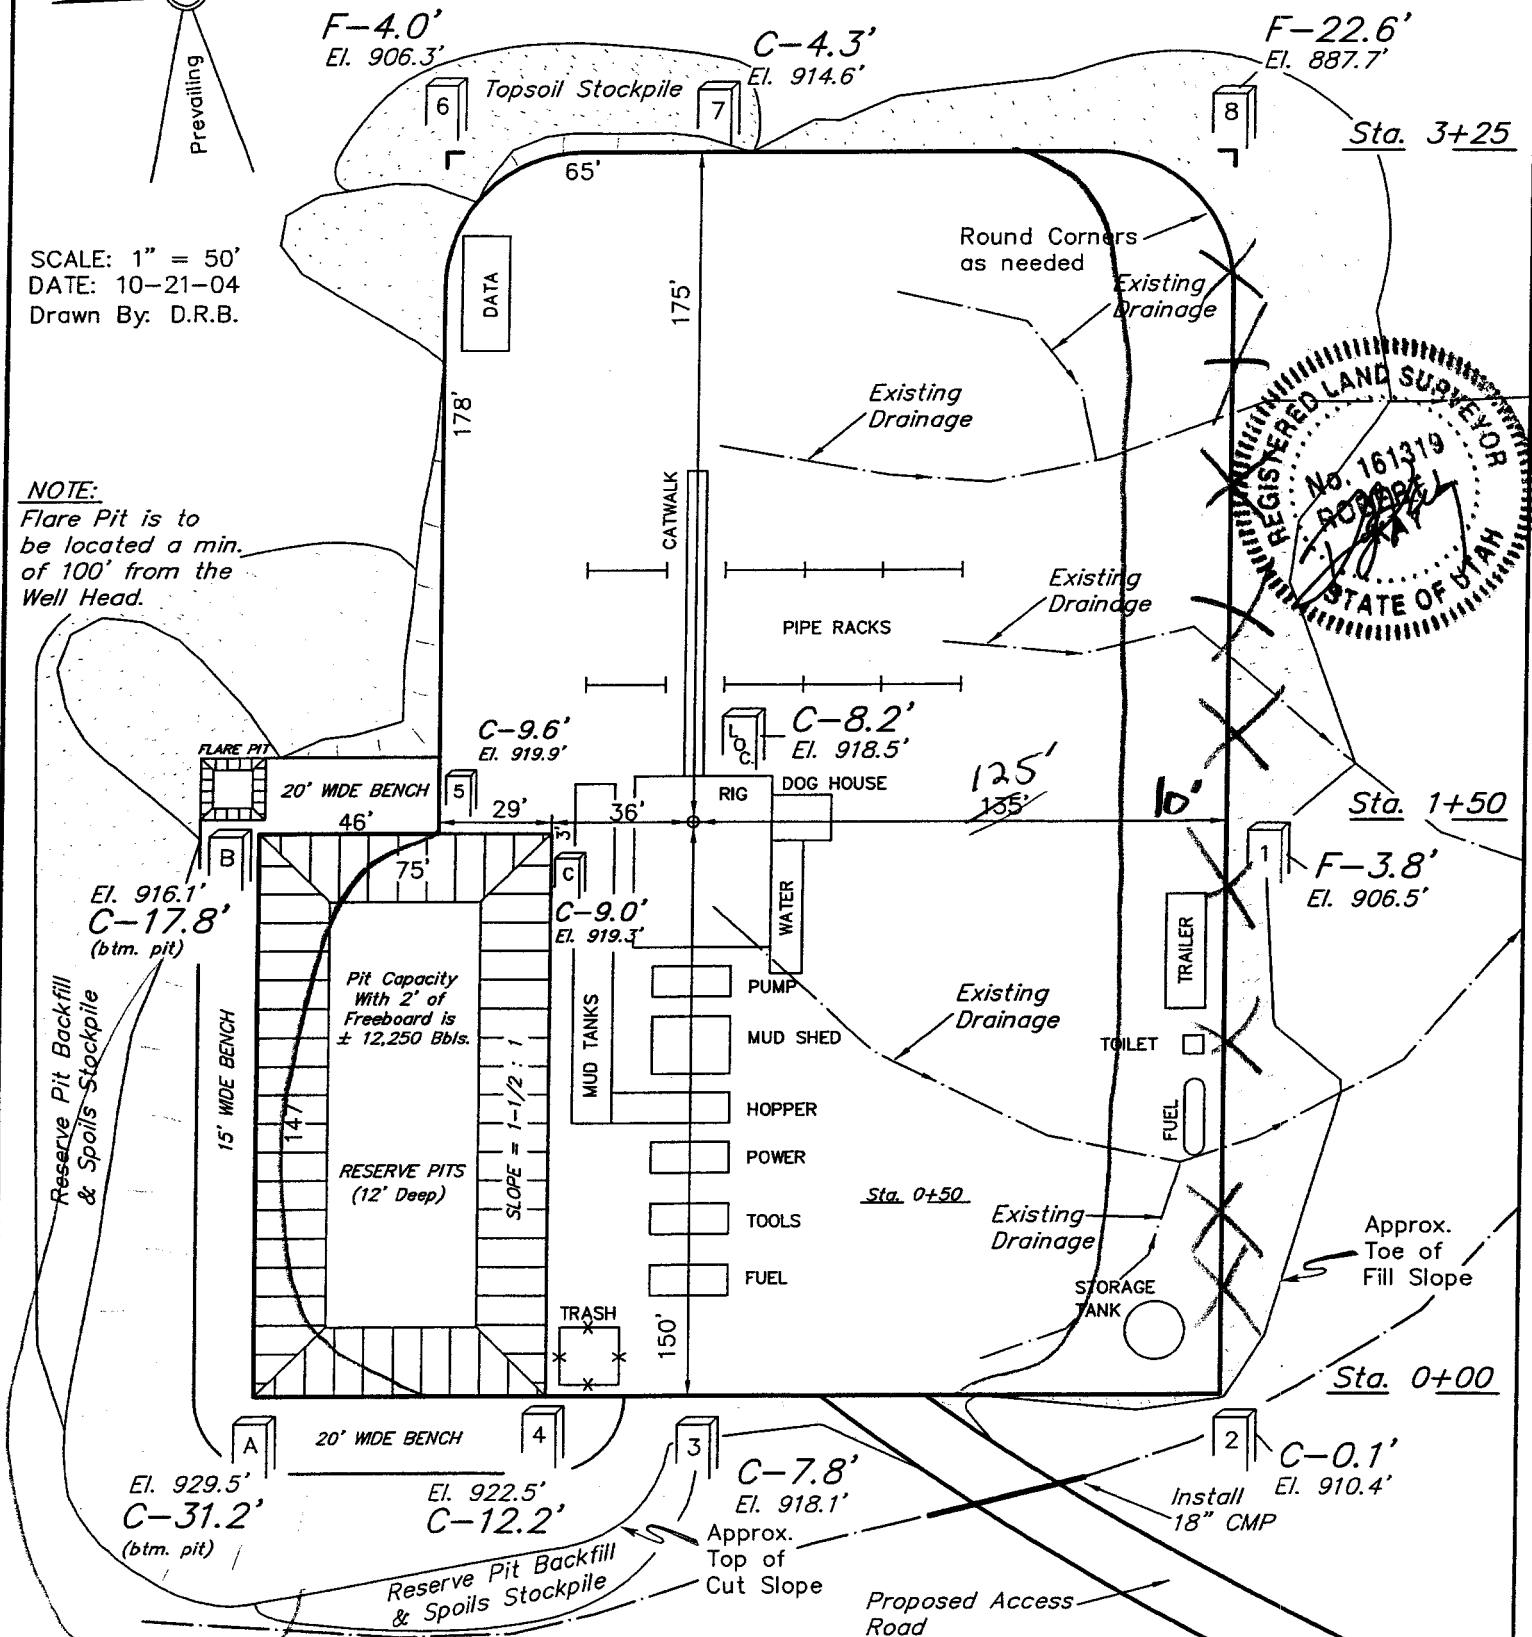

Elev. Ungraded Ground at Location Stake = 4918.5'
Elev. Graded Ground at Location Stake = 4910.3'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017



EOG RESOURCES, INC.

TYPICAL CROSS SECTIONS FOR

NORTH CHAPITA #293-28
SECTION 28, T8S, R22E, S.L.B.&M.
1735' FNL 850' FEL

1" = 20'
X-Section
Scale
1" = 50'

DATE: 10-21-04
Drawn By: D.R.B.

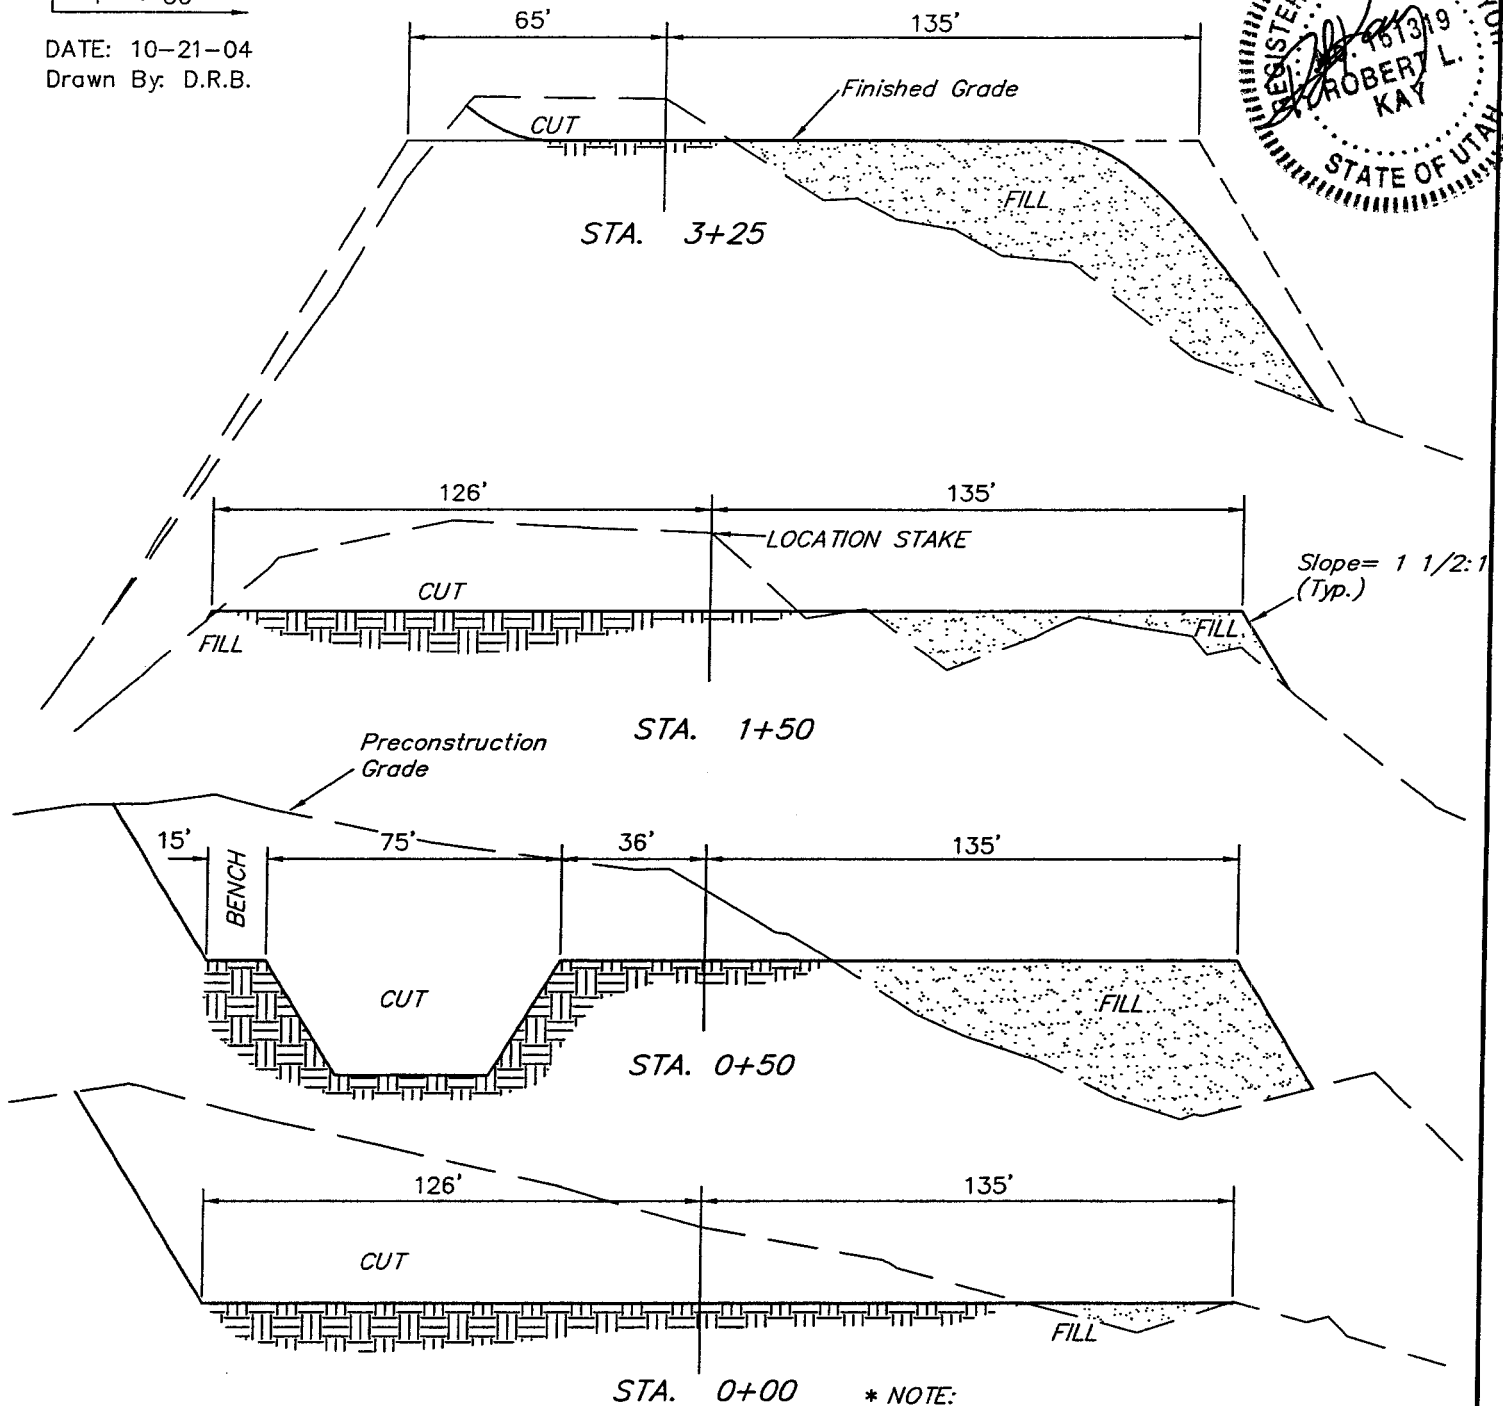

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION


APPROXIMATE YARDAGES

(12") Topsoil Stripping	= 4,000 Cu. Yds.
Remaining Location	= 17,030 Cu. Yds.
TOTAL CUT	= 21,030 CU.YDS.
FILL	= 15,370 CU.YDS.

EXCESS MATERIAL	= 5,660 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 5,660 Cu. Yds.
EXCESS UNBALANCE (After Rehabilitation)	= 0 Cu. Yds.

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017



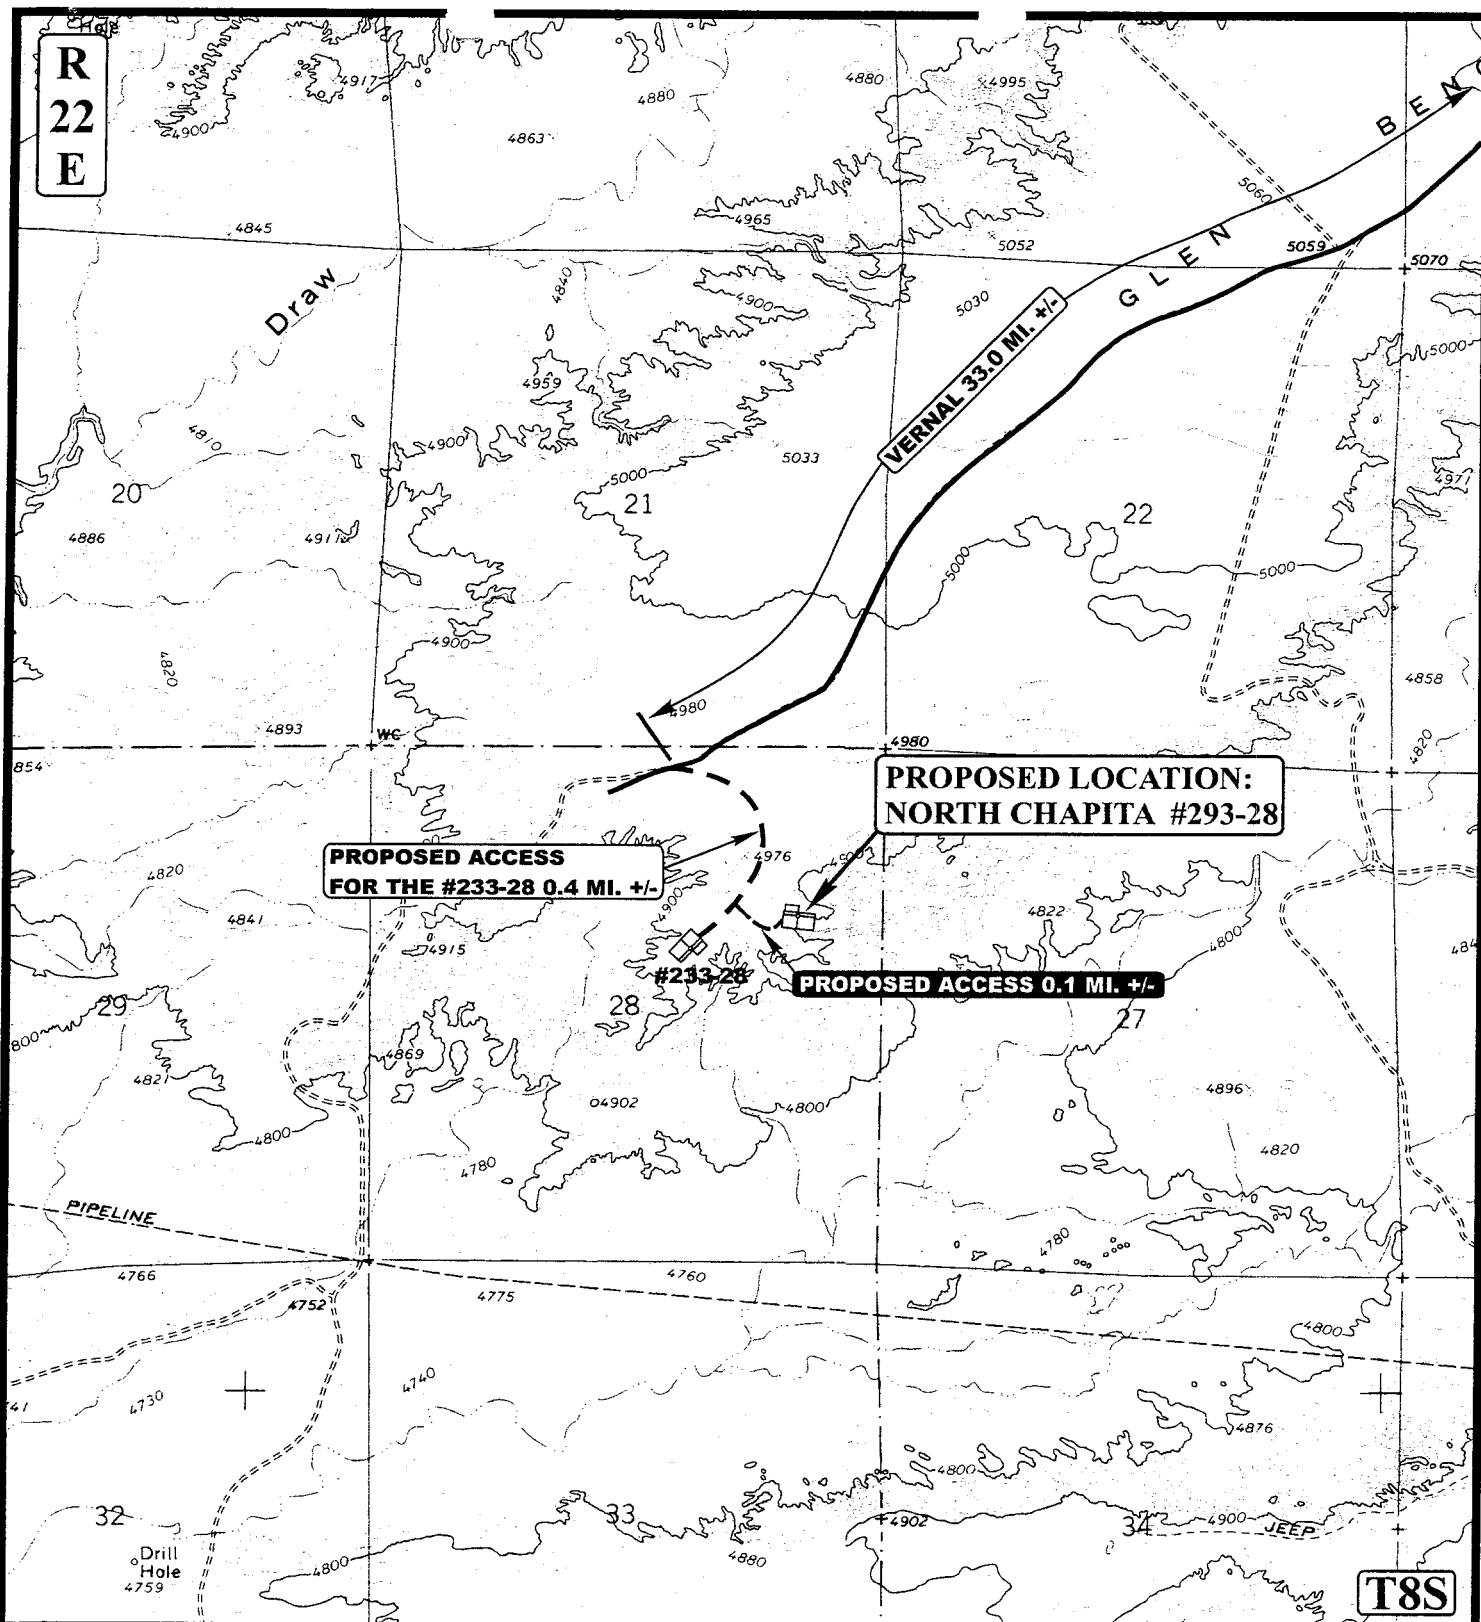

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD
- PROPOSED ROAD



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



EOG RESOURCES, INC.


NORTH CHAPITA #293-28
SECTION 28, T8S, R22E, S.L.B.&M.
1735' FNL 850' FEL

TOPOGRAPHIC
MAP

10 01 04
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00

B
TOPO

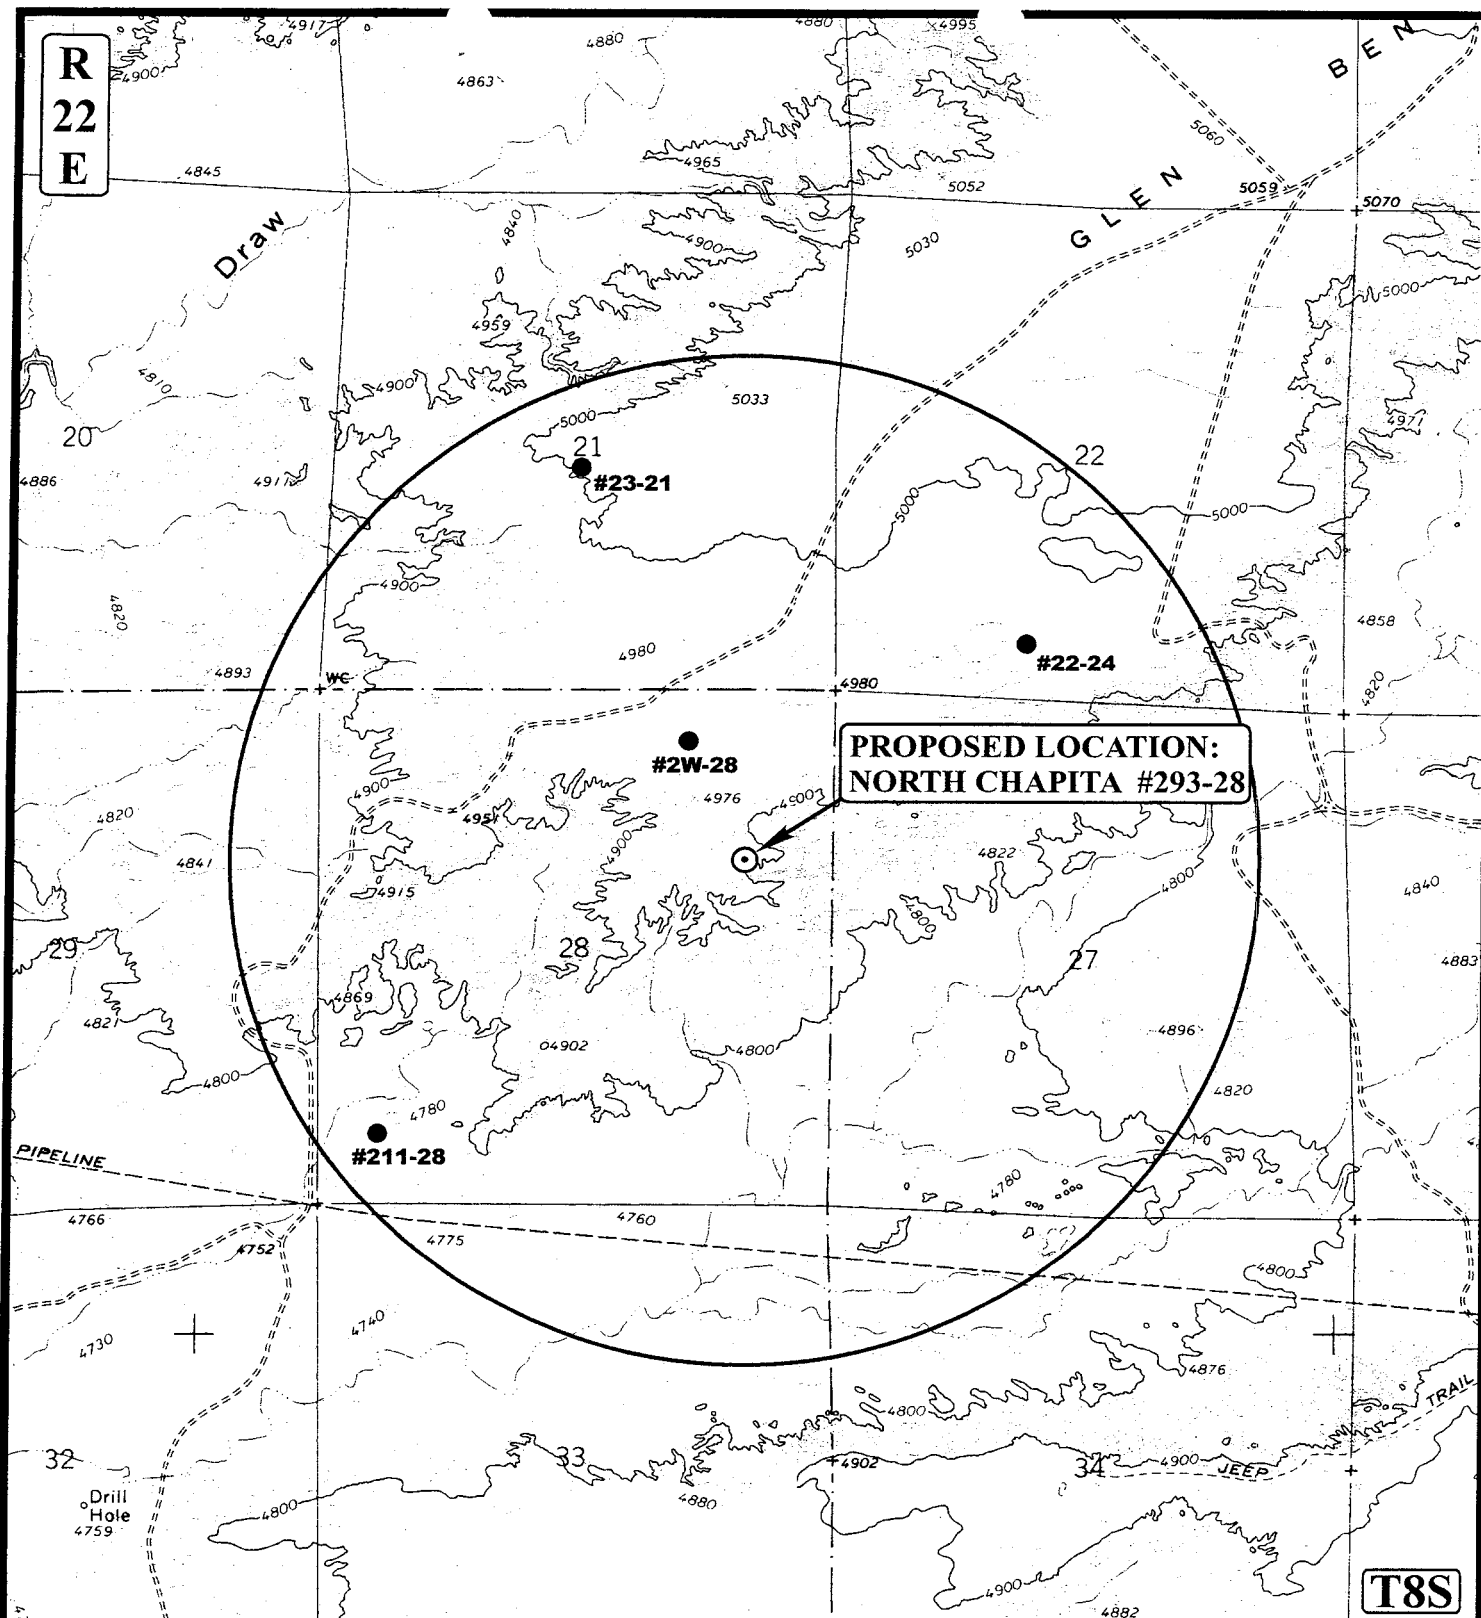

LEGEND:

- | | |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS | ⊗ WATER WELLS |
| ● PRODUCING WELLS | ● ABANDONED WELLS |
| ● SHUT IN WELLS | ● TEMPORARILY ABANDONED |



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



EOG RESOURCES, INC.


NORTH CHAPITA #293-28
SECTION 28, T8S, R22E, S.L.B.&M.
1735' FNL 850' FEL

TOPOGRAPHIC
MAP

10 01 04
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 00-00-00



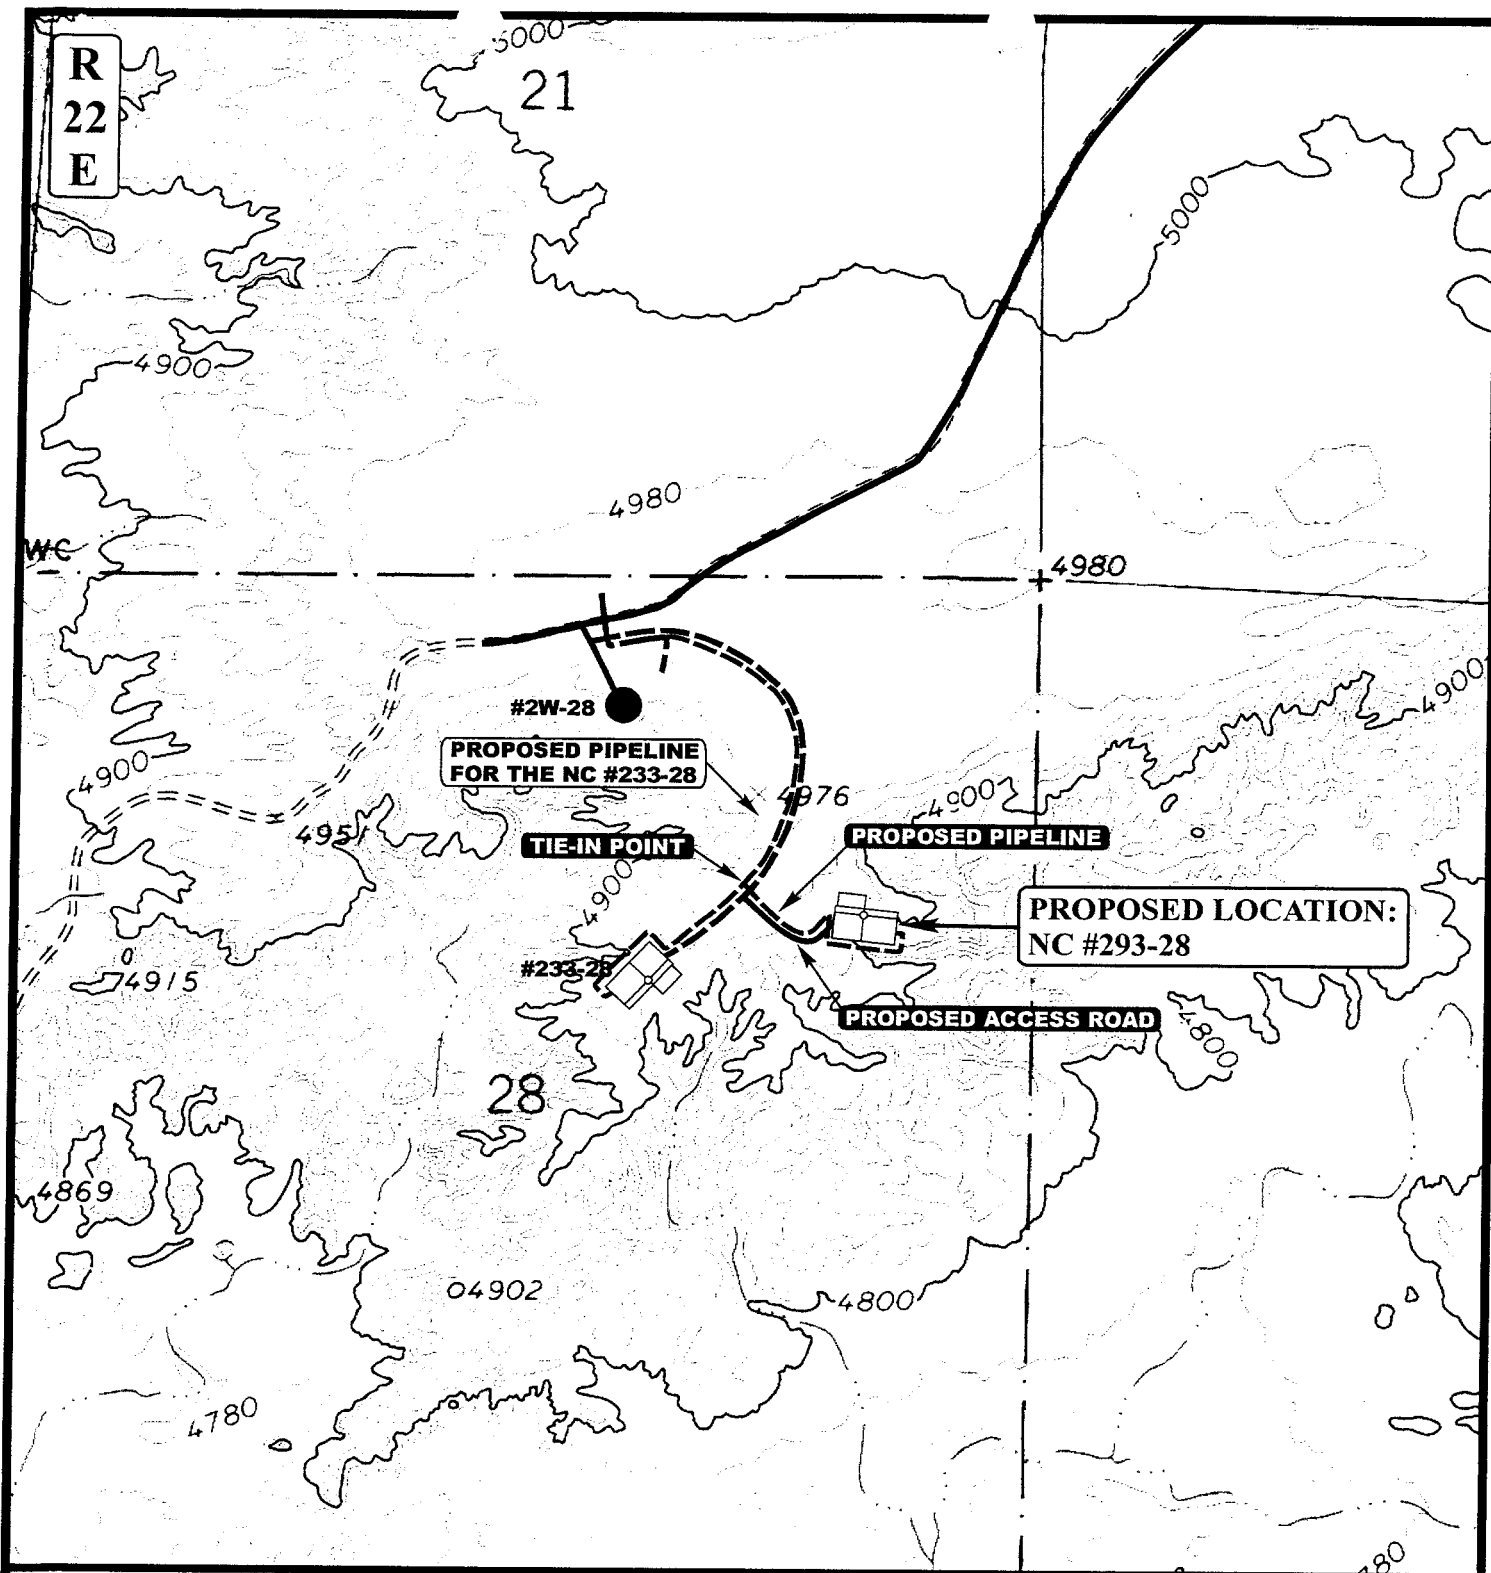

APPROXIMATE TOTAL PIPELINE DISTANCE = 1192' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE



EOG RESOURCES, INC.

NORTH CHAPITA #293-28
SECTION 28, T8S, R22E, S.L.B.&M.
1735' FNL 850' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC **10** **01** **04**
MAP MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: L.K. REVISED: 00-00-00

D
TOPO

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 09/13/2005

API NO. ASSIGNED: 43-047-37135

WELL NAME: N CHAPITA 293-28

OPERATOR: EOG RESOURCES INC (N9550)

CONTACT: ED TROTTER

PHONE NUMBER: 435-789-4120

PROPOSED LOCATION:

SENE 28 080S 220E

SURFACE: 1735 FNL 0850 FEL

BOTTOM: 1735 FNL 0850 FEL

UINTAH

NATURAL BUTTES (630)

LEASE TYPE: 1 - Federal

LEASE NUMBER: U-059

SURFACE OWNER: 2 - Indian

PROPOSED FORMATION: PRRV

COALBED METHANE WELL? NO

INSPECT LOCATN BY: / /

Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LATITUDE: 40.09711

LONGITUDE: -109.4381

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM-2308)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. 49-1501)
☒ RDCC Review (Y/N)
(Date:)
☒ Fee Surf Agreement (Y/N)
☒ Intent to Commingle (Y/N)


LOCATION AND SITING:

☐ R649-2-3.
Unit _____
☐ R649-3-2. General
☒ Siting: 460 From Qtr/Qtr & 920' Between Wells
☐ R649-3-3. Exception
☐ Drilling Unit
Board Cause No: _____
Eff Date: _____
Siting: _____
☐ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: 1. Federal Approval

2. Spacing Strip

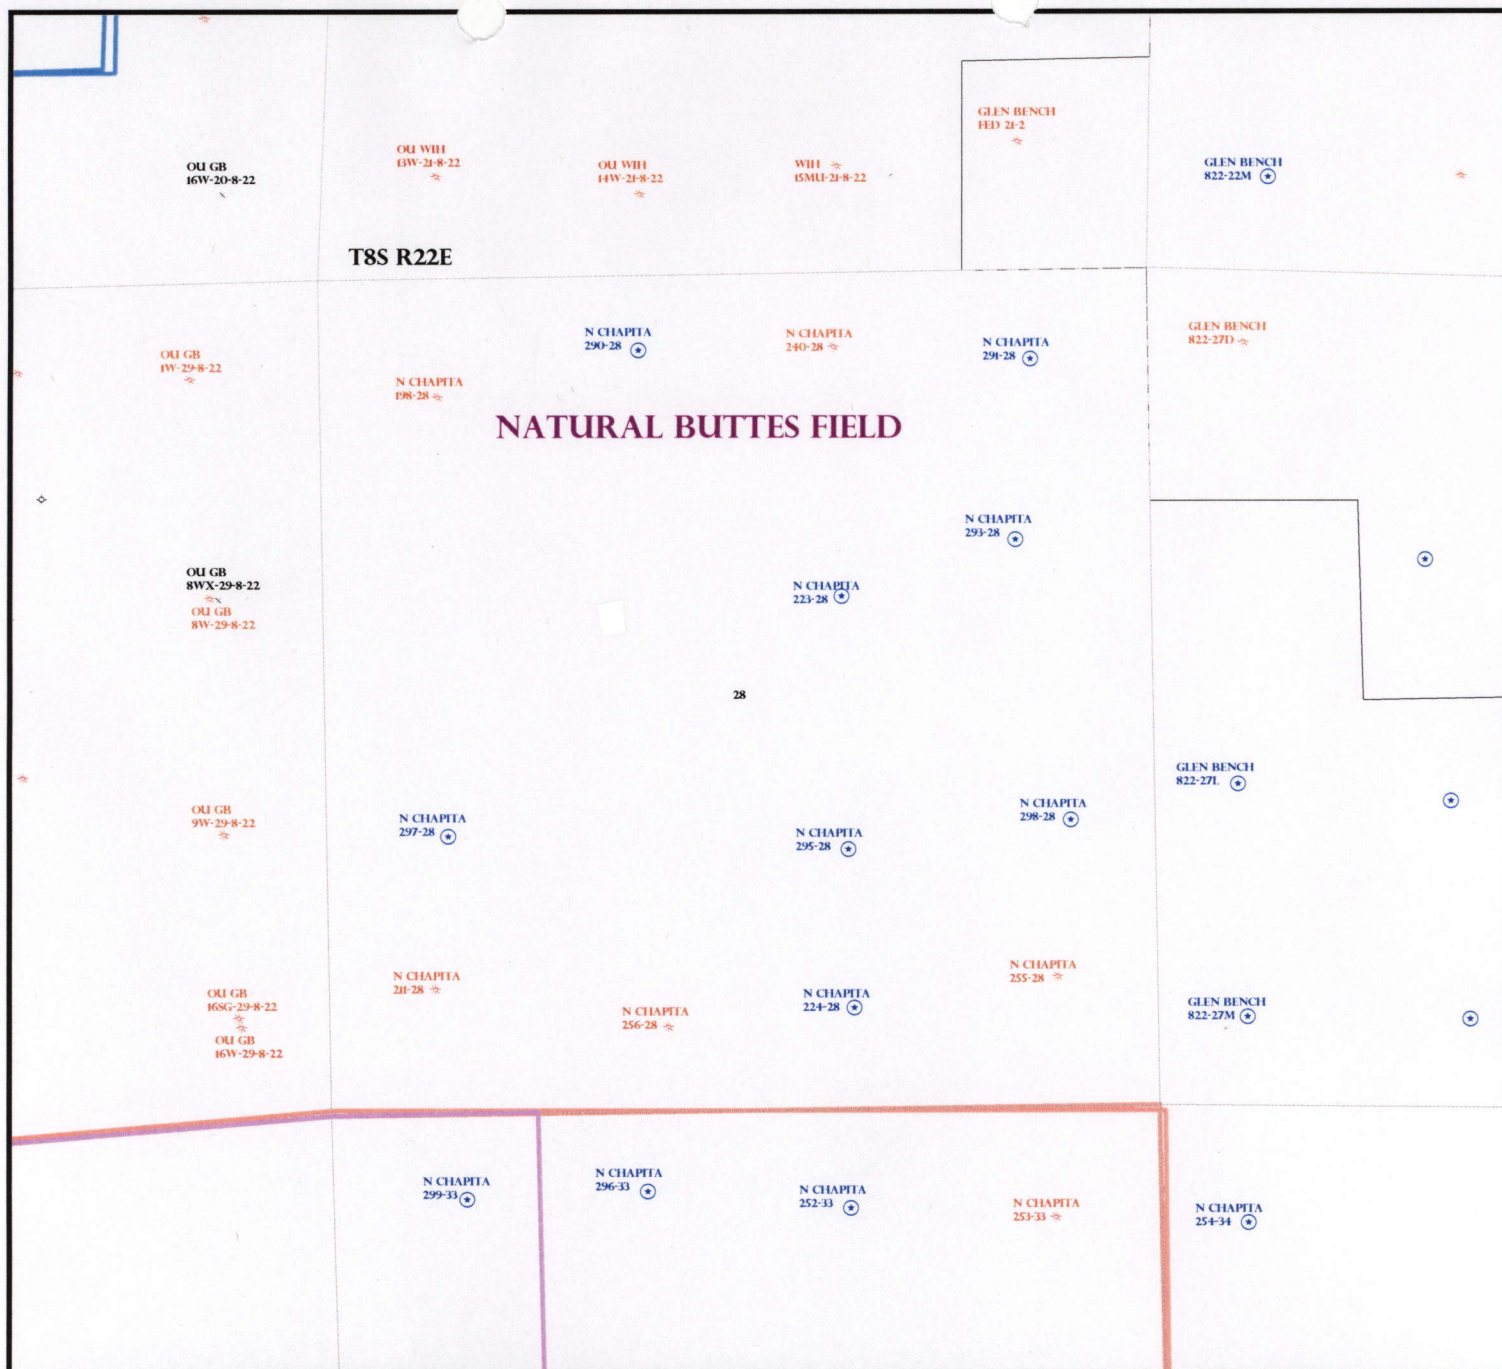

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 28 T. 8S R. 22E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

SPACING: R649-3-3 / EXCEPTION LOCATION

Field Status


- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Wells Status

- GAS INJECTION
- GAS STORAGE
- LOCATION ABANDONED
- NEW LOCATION
- PLUGGED & ABANDONED
- PRODUCING GAS
- PRODUCING OIL
- SHUT-IN GAS
- SHUT-IN OIL
- TEMP. ABANDONED
- TEST WELL
- WATER INJECTION
- WATER SUPPLY
- WATER DISPOSAL
- DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA WHITNEY
DATE: 15-SEPTEMBER-2005



EOG Resources, Inc.
600 Seventeenth Street
Suite 1000N
Denver, CO 80202
Main: 303-572-9000
Fax: 303-824-5400

August 1, 2008

State of Utah
Division of Oil, Gas and Mining
P.O. Box 145801
Salt Lake City, Utah 84114-5801

RECEIVED
AUG 05 2008
DIV. OF OIL, GAS & MINING

Attention: Ms. Diana Whitney

RE: Request for Exception to Location
and Siting of Wells
North Chapita 293-28
SE/4NE/4 of Section 28-8S-22E, SLM
Uintah County, Utah
White River Prospect
1505-G06, 0050549-000

Ladies and Gentlemen:

EOG Resources, Inc. ("EOG") proposes and respectfully requests permission to drill the North Chapita 293-28, a 10,675' Wasatch/Mesaverde test well, at a location 1735' FNL, 850' FEL (SE/4NE/4) of Section 28, Township 8 South, Range 22 East, SLM, Uintah County, Utah, which is not a location at which a well could be drilled in compliance with General Rule R649-3-2.

The subject North Chapita 293-28 location was first selected based on geology. EOG endeavored to stake it at a legal location in accordance with General Rule R649-3-2, but found that a legal location could not be staked due to rugged terrain. Therefore, EOG is requesting this exception location.

Enclosed herewith is a copy of the survey plat for the proposed well and another plat labeled Exhibit "A" which depicts the outlines of the locations at which oil and gas wells could be drilled in compliance with General Rule R649-3-2, the location at which EOG requests permission to drill the proposed North Chapita 293-28 well, and the Wasatch/Mesaverde formation well(s) which have been drilled within the area.

Questar Exploration and Production Company ("Questar") and III Exploration Company ("III") are the only owners of operating rights within a 460' radius of the proposed North Chapita 293-28 well (see Exhibit "B" enclosed). A letter dated May 16, 2008, in which Questar and III have evidenced their written consent to EOG's proposed drilling of the North Chapita 293-28 well at the requested exception location is also enclosed.


Division of Oil, Gas and Mining
August 1, 2008
Page 2 of 2

EOG respectfully requests the Utah Division of Oil, Gas and Mining review and grant administrative approval of this application for an exception well location and permission to drill the proposed Wasatch/Mesaverde formation well described herein at its earliest opportunity.

If you have any questions or need any additional information, please do not hesitate to contact the undersigned.

Sincerely,

EOG RESOURCES, INC.


A handwritten signature in black ink that reads "Debbie Spears". The signature is written in a cursive, flowing style.

Debbie Spears
Land Associate

/das
Enclosures
M:\das\exceptionlocation\nc293-28.doc

cc: Kaylene Gardner

T8S, R22E, S.L.B.&M.

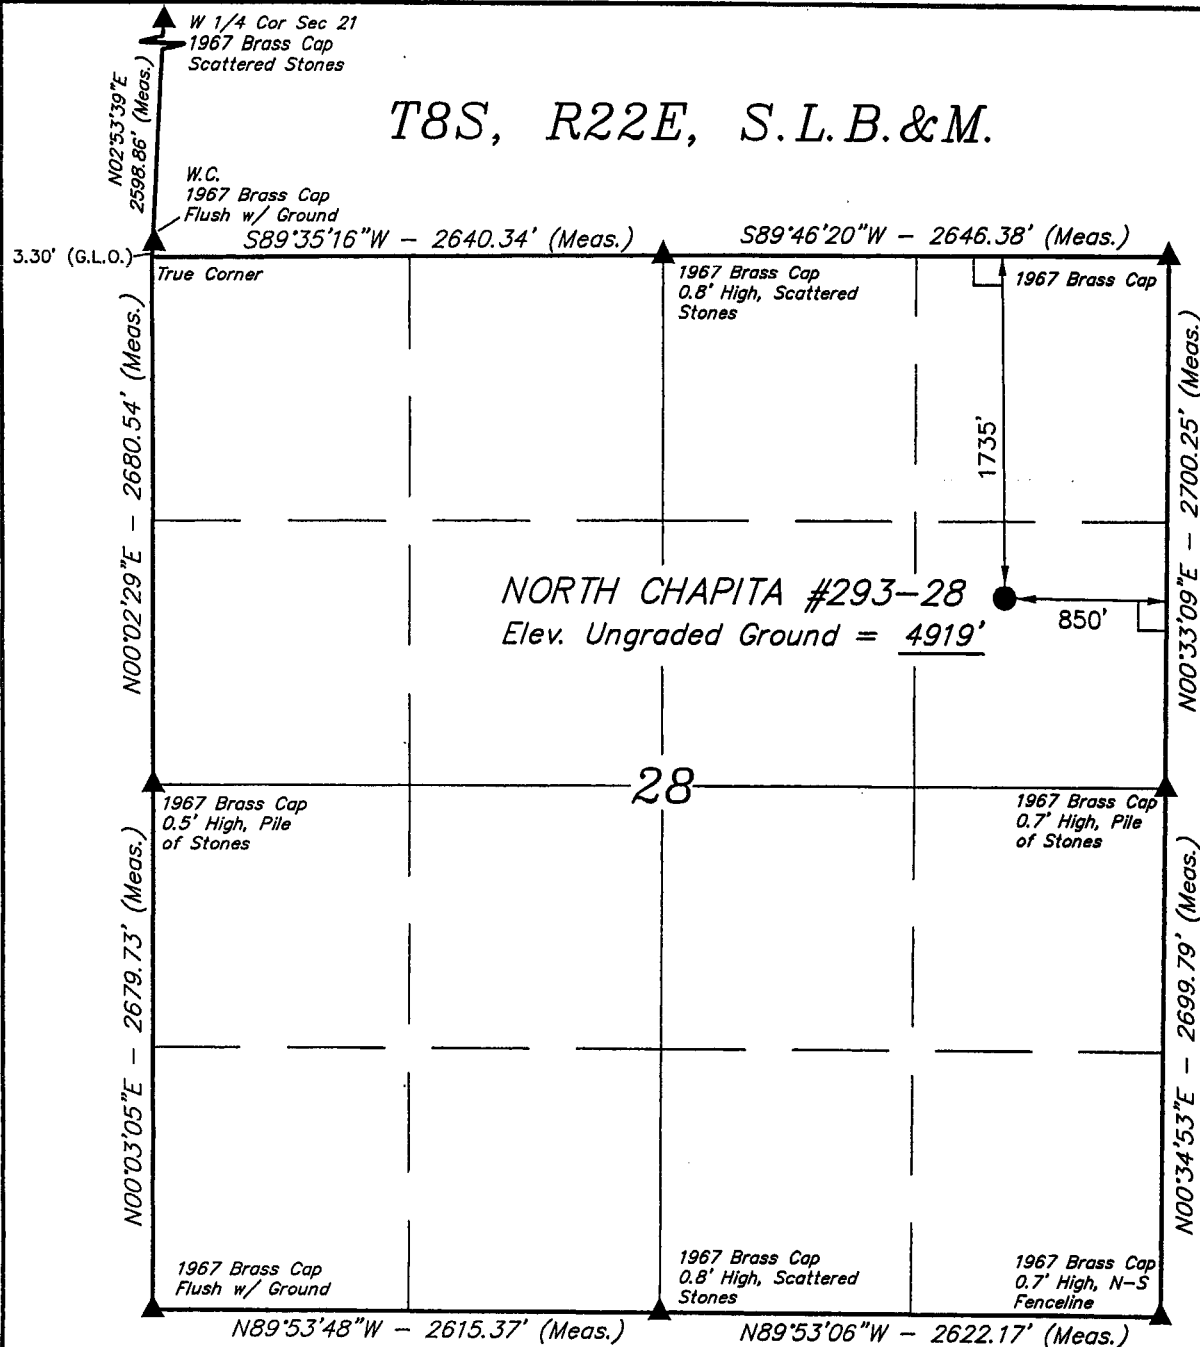

LEGEND:

└─┘ = 90° SYMBOL

● = PROPOSED WELL HEAD.

▲ = SECTION CORNERS LOCATED.

(NAD 83)

LATITUDE = 40°05'49.74" (40.097150)

LONGITUDE = 109°26'19.43" (109.438731)

(NAD 27)

LATITUDE = 40°05'49.87" (40.097186)

LONGITUDE = 109°26'16.96" (109.438044)

EOG RESOURCES, INC.


Well location, NORTH CHAPITA #293-28, located as shown in the SE 1/4 NE 1/4 of Section 28, T8S, R22E, S.L.B.&M. Uintah County, Utah.

BASIS OF ELEVATION

BENCH MARK 20EAM LOCATED IN THE SE 1/4 OF SECTION 35, T8S, R21E, S.L.B.&M. TAKEN FROM THE OURAY SE, QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 4697 FEET.

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

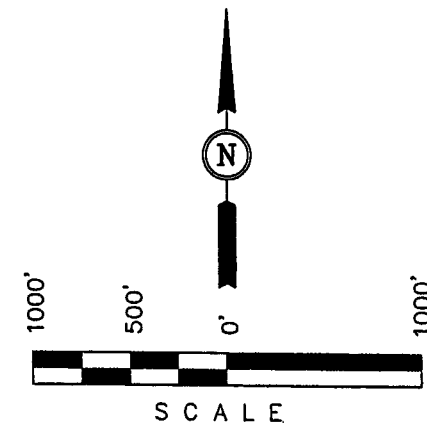

CERTIFICATE


THIS IS TO CERTIFY THAT THE ABOVE MAP WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

REGISTERED LAND SURVEYOR
REGISTRATION NO. 161319
STATE OF UTAH


UNTAE ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 09-27-04	DATE DRAWN: 10-15-04
PARTY B.B. T.H. D.R.B.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE EOG RESOURCES, INC.	

R 22 E

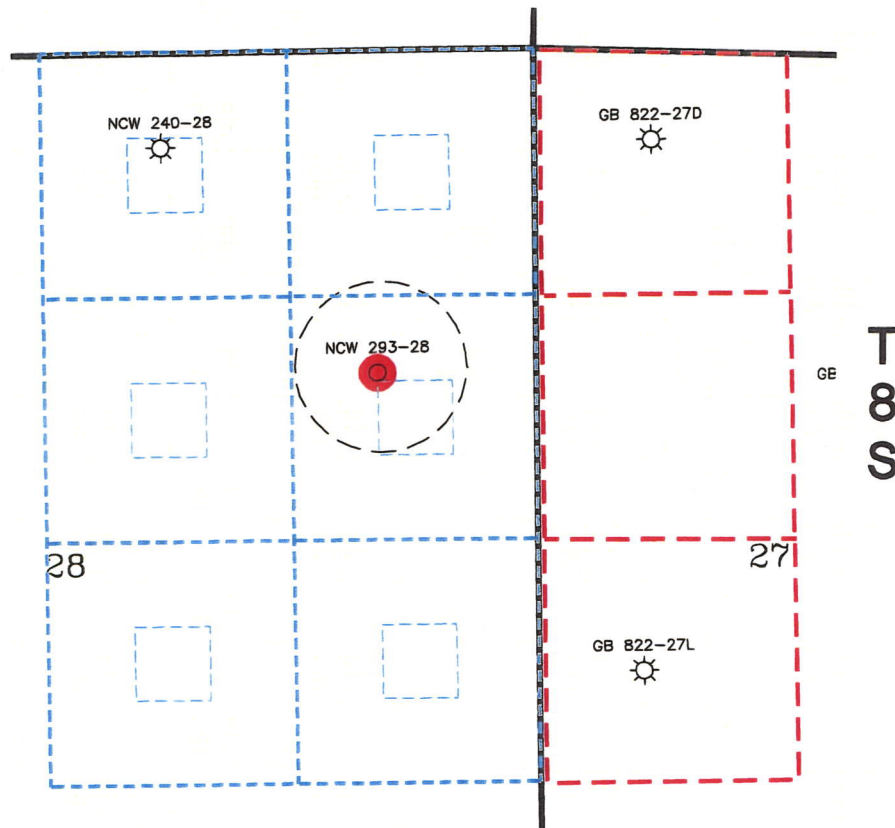

- Oil or Gas Well Location Pattern pursuant to Utah Administrative Code Rule R 649-3-2
- Legal window within which an oil and gas well could be drilled in compliance with R 649-3-2.
- Modification of General Rule R 649-3-2(1) for wells targeting gas and associated hydrocarbons from the Wasatch and Mesaverde Group under Cause No. 187-9



☉ ☼ ☀ Locations at which oil or gas wells have been drilled

● Location at which applicant requests permission to drill the proposed North Chapita 293-28 Well: 1735' FNL, 850' FEL (SENE) of Sec. 28, T8S, R22E

Scale: 1"=1000'

0 1/4 1/2 Mile



Exhibit "A"



Denver Division

Application for
Exception Well Location

NORTH CHAPITA 293-28 WELL

UINTAH COUNTY, UTAH

Scale: 1"=1000'


D:\utah\exception_plats\ex08s22e-28.dwg
exe_A_40

Author

gt

May 01, 2008 -
9:16am

R 22 E

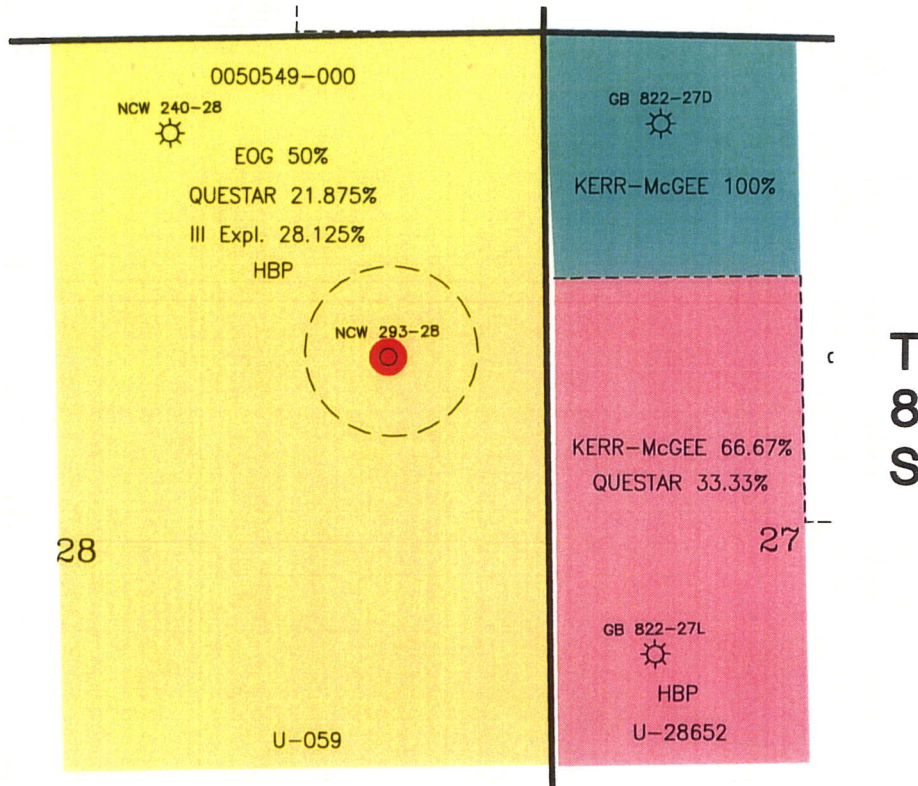

Working Interest

- EOG 50%, QUESTAR 21.875%, III EXPLORATION 28.125%
- KERR-MCGEE 100%
- KERR-MCGEE 66.67%, QUESTAR 33.33%

● Location at which applicant requests permission to drill the proposed North Chapita 293-28 Well: 1735' FNL, 850' FEL (SENE) of Sec. 28, T8S, R22E

Exhibit "B"

Scale: 1"=1000'

0 1/4 1/2 Mile



Denver Division

Application for
Exception Well Location
NORTH CHAPITA 293-28 WELL

UINTAH COUNTY, UTAH

Scale: 1"=1000'

D:\utah\exception_plat\exc28-28.dwg
exc_B_40

Author

May 01, 2008 -
9:16am



EOG Resources, Inc.
600 Seventeenth Street
Suite 1000N
Denver, CO 80202
Main: 303-572-9000
Fax: 303-824-5400

May 6, 2008

Questar Exploration and Production Company
1050 17th Street, Suite 500
Denver, Colorado 80265
Attention: Mr. Cory Miller

iii Exploration Company
410 17th Street, Suite 1230
Denver, Colorado 80202
Attention: Mr. Phil Shepardson

RE: Request for Consent to
Exception Well Location
North Chapita 293-28
SE/4NE/4 of Sec. 28-8S-22E, SLM
Uintah County, Utah
White River Prospect
1505-G06, 0050549-000

Gentlemen:

EOG Resources, Inc. ("EOG") has staked and proposes to drill the North Chapita 293-28, a 10,675' Wasatch/Mesaverde formation test well, at a location 1735' FNL, 850' FWL (SE/4NE/4) of Section 28, Township 8 South, Range 22 East, SLM, Uintah County, Utah (see enclosed copy of plat).

The State of Utah Board of Oil, Gas and Mining established General Rule R649-3-2, which requires a well be located in the center of a 40-acre quarter-quarter section with a tolerance of 200' in any direction (a window 400' square) and not less than 920' from any other well drilling to, completed in and/or capable of producing from same pool.

Inasmuch as the location of the proposed North Chapita 293-28 well is not in compliance with this general rule, EOG will request the State of Utah Division of Oil, Gas and Mining's administrative approval of such location as an exception location in accordance with General Rule R649-3-3. Such Rule requires EOG to submit written consent from all owners within a 460' radius of the proposed well.

RECEIVED

JUL 02 2008

EOG Resources, Inc.
Denver

energy opportunity growth

Questar Exploration and Production Company
III Exploration Company
May 5, 2008
Page 2 of 2

Therefore, if you have no objections to EOG's drilling this proposed Wasatch/Mesaverde test well at the above-described location, EOG respectfully requests you so indicate such written consent to same by having this letter dated and executed in the spaces provided below and returning one (1) originally executed copy to my attention at the letterhead address at your very earliest opportunity.

Thank you for your favorable consideration of this request. If you have any questions, please don't hesitate to call the undersigned at (303) 824-5430.

Sincerely,

EOG RESOURCES, INC.




Debbie Spears
Land Associate

/das
exloc\inc293-28

On this 30th day of June, 2008, the undersigned hereby grants its written consent to EOG Resources, Inc.'s drilling the proposed Wasatch/Mesaverde test, the North Chapita 293-28, at a location 1735' FNL, 850' FEL (SE/4NE/4) of Section 28, Township 8 South, Range 22 East, SLM, Uintah County, Utah, which location is an exception to State of Utah Board of Oil, Gas and Mining's General Rule R649-3-2.

QUESTAR EXPLORATION AND PRODUCTION COMPANY

By: 

Title: General Manager

III EXPLORATION COMPANY

By: _____

Title: _____

Questar Exploration and Production Company
III Exploration Company
May 5, 2008
Page 2 of 2

Therefore, if you have no objections to EOG's drilling this proposed Wasatch/Mesaverde test well at the above-described location, EOG respectfully requests you so indicate such written consent to same by having this letter dated and executed in the spaces provided below and returning one (1) originally executed copy to my attention at the letterhead address at your very earliest opportunity.

Thank you for your favorable consideration of this request. If you have any questions, please don't hesitate to call the undersigned at (303) 824-5430.

Sincerely,

EOG RESOURCES, INC.



Debbie Spears
Land Associate

/das
exloc\nc293-28

On this 7 day of May, 2008, the undersigned hereby grants its written consent to EOG Resources, Inc.'s drilling the proposed Wasatch/Mesaverde test, the North Chapita 293-28, at a location 1735' FNL, 850' FEL (SE/4NE/4) of Section 28, Township 8 South, Range 22 East, SLM, Uintah County, Utah, which location is an exception to State of Utah Board of Oil, Gas and Mining's General Rule R649-3-2.

QUESTAR EXPLORATION AND PRODUCTION COMPANY

By: _____

Title: _____

III EXPLORATION COMPANY

By:  _____

Title: VP Engineering and Production



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

August 5, 2008

EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078

Re: North Chapita 293-28 Well, 1735' FNL, 850' FEL, SE NE, Sec. 28, T. 8 South,
R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

Appropriate information has been submitted to DOGM and administrative approval of the requested exception location is hereby granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-37135.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor
Bureau of Land Management, Vernal Office



Operator: EOG Resources, Inc.
Well Name & Number North Chapita 293-28
API Number: 43-047-37135
Lease: U-059

Location: SE NE Sec. 28 T. 8 South R. 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.


- Contact Dustin Doucet at (801) 538-5281 (801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-059			
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE			
2. NAME OF OPERATOR: EOG Resources, Inc.		7. UNIT or CA AGREEMENT NAME:			
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078		8. WELL NAME and NUMBER: N CHAPITA 293-28			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1735 FNL 0850 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 28 Township: 08.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047371350000			
PHONE NUMBER: 435 781-9111 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES			
COUNTY: UINTAH		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/4/2009 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____ </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.					
Approved by the Utah Division of Oil, Gas and Mining					
Date: August 06, 2009					
By: 					
NAME (PLEASE PRINT) Mickenzie Thacker	PHONE NUMBER 435 781-9145	TITLE Operations Clerk			
SIGNATURE N/A	DATE 8/4/2009				

RECEIVED August 04, 2009



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371350000

API: 43047371350000

Well Name: N CHAPITA 293-28

Location: 1735 FNL 0850 FEL QTR SENE SEC 28 TWNP 080S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 8/5/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Mickenzie Thacker

Date: 8/4/2009

Title: Operations Clerk **Representing:** EOG RESOURCES, INC.

Date: August 06, 2009

By:

RECEIVED August 04, 2009

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-059			
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE			
2. NAME OF OPERATOR: EOG Resources, Inc.		7. UNIT or CA AGREEMENT NAME:			
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078		8. WELL NAME and NUMBER: N CHAPITA 293-28			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1735 FNL 0850 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 28 Township: 08.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047371350000			
PHONE NUMBER: 435 781-9111 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES			
COUNTY: UINTAH		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 7/26/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____ </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.					
Approved by the Utah Division of Oil, Gas and Mining					
Date: <u>July 26, 2010</u>					
By:					
NAME (PLEASE PRINT) Michelle Robles	PHONE NUMBER 307 276-4842	TITLE Regulatory Assistant			
SIGNATURE N/A	DATE 7/26/2010				



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371350000

API: 43047371350000

Well Name: N CHAPITA 293-28

Location: 1735 FNL 0850 FEL QTR SENE SEC 28 TWNP 080S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 8/5/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Michelle Robles


Date: 7/26/2010

Title: Regulatory Assistant **Representing:** EOG RESOURCES, INC.

Date: July 26, 2010

By: 

RECEIVED July 26, 2010

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-059
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well		8. WELL NAME and NUMBER: N CHAPITA 293-28
2. NAME OF OPERATOR: EOG Resources, Inc.		9. API NUMBER: 43047371350000
3. ADDRESS OF OPERATOR: 1060 East Highway 40 , Vernal, UT, 84078		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1735 FNL 0850 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 28 Township: 08.0S Range: 22.0E Meridian: S		COUNTY: UINTAH
		STATE: UTAH
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA		
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 8/2/2011 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </div> <div style="width: 33%;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </div> <div style="width: 33%;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: </div> </div>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.		
Approved by the Utah Division of Oil, Gas and Mining Date: 08/03/2011 By: 		
NAME (PLEASE PRINT) Mckenzie Gates		PHONE NUMBER 435 781-9145
SIGNATURE N/A		TITLE Operations Clerk
		DATE 8/2/2011



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371350000

API: 43047371350000

Well Name: N CHAPITA 293-28

Location: 1735 FNL 0850 FEL QTR SENE SEC 28 TWNP 080S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 8/5/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Mickenzie Gates

Date: 8/2/2011

Title: Operations Clerk **Representing:** EOG RESOURCES, INC.

RECEIVED Aug. 02, 2011

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-059
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
2. NAME OF OPERATOR: EOG Resources, Inc.		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202		8. WELL NAME and NUMBER: N CHAPITA 293-28
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1735 FNL 0850 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 28 Township: 08.0S Range: 22.0E Meridian: S		9. API NUMBER: 43047371350000
PHONE NUMBER: 435 781-9111 Ext		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
COUNTY: Uintah		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: <div style="text-align: center; font-size: 1.2em;">7/9/2012</div> <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<div style="display: flex; flex-wrap: wrap;"> <div style="width: 33%;"><input type="checkbox"/> ACIDIZE</div> <div style="width: 33%;"><input type="checkbox"/> ALTER CASING</div> <div style="width: 33%;"><input type="checkbox"/> CASING REPAIR</div> <div style="width: 33%;"><input type="checkbox"/> CHANGE TO PREVIOUS PLANS</div> <div style="width: 33%;"><input type="checkbox"/> CHANGE TUBING</div> <div style="width: 33%;"><input type="checkbox"/> CHANGE WELL NAME</div> <div style="width: 33%;"><input type="checkbox"/> CHANGE WELL STATUS</div> <div style="width: 33%;"><input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS</div> <div style="width: 33%;"><input type="checkbox"/> CONVERT WELL TYPE</div> <div style="width: 33%;"><input type="checkbox"/> DEEPEN</div> <div style="width: 33%;"><input type="checkbox"/> FRACTURE TREAT</div> <div style="width: 33%;"><input type="checkbox"/> NEW CONSTRUCTION</div> <div style="width: 33%;"><input type="checkbox"/> OPERATOR CHANGE</div> <div style="width: 33%;"><input type="checkbox"/> PLUG AND ABANDON</div> <div style="width: 33%;"><input type="checkbox"/> PLUG BACK</div> <div style="width: 33%;"><input type="checkbox"/> PRODUCTION START OR RESUME</div> <div style="width: 33%;"><input type="checkbox"/> RECLAMATION OF WELL SITE</div> <div style="width: 33%;"><input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION</div> <div style="width: 33%;"><input type="checkbox"/> REPERFORATE CURRENT FORMATION</div> <div style="width: 33%;"><input type="checkbox"/> SIDETRACK TO REPAIR WELL</div> <div style="width: 33%;"><input type="checkbox"/> TEMPORARY ABANDON</div> <div style="width: 33%;"><input type="checkbox"/> TUBING REPAIR</div> <div style="width: 33%;"><input type="checkbox"/> VENT OR FLARE</div> <div style="width: 33%;"><input type="checkbox"/> WATER DISPOSAL</div> <div style="width: 33%;"><input type="checkbox"/> WATER SHUTOFF</div> <div style="width: 33%;"><input type="checkbox"/> SI TA STATUS EXTENSION</div> <div style="width: 33%;"><input checked="" type="checkbox"/> APD EXTENSION</div> <div style="width: 33%;"><input type="checkbox"/> WILDCAT WELL DETERMINATION</div> <div style="width: 33%;"><input type="checkbox"/> OTHER</div> </div>

OTHER:

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: July 11, 2012

By:

NAME (PLEASE PRINT) Vail Nazarro	PHONE NUMBER 303 824-5590	TITLE Sr. Regulatory Assistant
SIGNATURE N/A	DATE 7/9/2012	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371350000

API: 43047371350000

Well Name: N CHAPITA 293-28

Location: 1735 FNL 0850 FEL QTR SENE SEC 28 TWP 080S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 8/5/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Vail Nazzaro

Date: 7/9/2012

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-059
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well	8. WELL NAME and NUMBER: N CHAPITA 293-28	
2. NAME OF OPERATOR: EOG Resources, Inc.	9. API NUMBER: 43047371350000	
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202	PHONE NUMBER: 435 781-9111 Ext	9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1735 FNL 0850 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 28 Township: 08.0S Range: 22.0E Meridian: S	COUNTY: UINTAH	
		STATE: UTAH

11.

CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 7/25/2013	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> CASING REPAIR
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> CHANGE WELL NAME
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> CONVERT WELL TYPE
<input type="checkbox"/> DRILLING REPORT Report Date:	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> NEW CONSTRUCTION
	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> PLUG BACK
	<input type="checkbox"/> PRODUCTION START OR RESUME	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION
	<input type="checkbox"/> REPERFORATE CURRENT FORMATION	<input type="checkbox"/> SIDETRACK TO REPAIR WELL	<input type="checkbox"/> TEMPORARY ABANDON
	<input type="checkbox"/> TUBING REPAIR	<input type="checkbox"/> VENT OR FLARE	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> WATER SHUTOFF	<input type="checkbox"/> SI TA STATUS EXTENSION	<input checked="" type="checkbox"/> APD EXTENSION
	<input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> OTHER	OTHER: <input type="text"/>

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

**Approved by the
Utah Division of
Oil, Gas and Mining**

Date: July 29, 2013

By: 

NAME (PLEASE PRINT) Vail Nazario	PHONE NUMBER 303 824-5590	TITLE Sr. Regulatory Assistant
SIGNATURE N/A		DATE 7/25/2013



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371350000

API: 43047371350000

Well Name: N CHAPITA 293-28

Location: 1735 FNL 0850 FEL QTR SENE SEC 28 TWP 080S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 8/5/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Vail Nazzaro

Date: 7/25/2013

Title: Sr. Regulatory Assistant Representing: EOG RESOURCES, INC.

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: U-059
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: UTE
		7. UNIT or CA AGREEMENT NAME:
1. TYPE OF WELL Gas Well		8. WELL NAME and NUMBER: N CHAPITA 293-28
2. NAME OF OPERATOR: EOG RESOURCES, INC.		9. API NUMBER: 43047371350000
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N , Denver, CO, 80202		9. FIELD and POOL or WILDCAT: NATURAL BUTTES
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1735 FNL 0850 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: SENE Section: 28 Township: 08.0S Range: 22.0E Meridian: S		COUNTY: UINTAH
		STATE: UTAH

11.


CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 7/30/2014	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: <input type="text"/>
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:			
<input type="checkbox"/> SPUD REPORT Date of Spud:			
<input type="checkbox"/> DRILLING REPORT Report Date:			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
 July 31, 2014
 Oil, Gas and Mining

Date: _____
 By: 

NAME (PLEASE PRINT) Donna J Skinner	PHONE NUMBER 303 262-9467	TITLE Sr. Regulatory Assistant
SIGNATURE N/A		DATE 7/30/2014



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43047371350000

API: 43047371350000

Well Name: N CHAPITA 293-28

Location: 1735 FNL 0850 FEL QTR SENE SEC 28 TWNP 080S RNG 220E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 8/5/2008

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☒ Yes ☐ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Donna J Skinner

Date: 7/30/2014

Title: Sr. Regulatory Assistant **Representing:** EOG RESOURCES, INC.



GARY R. HERBERT
Governor

SPENCER J. COX
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

September 10, 2015

EOG Resources, Inc.
600 17th Street, Suite 1000 N
Denver, CO 80202

Re: APDs Rescinded for EOG Resources Inc., Uintah County


Ladies and Gentlemen:

Enclosed find the list of APDs that is being rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded as of September 10, 2015.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal

43-047-36955	SCU 87-20
43-047-37135	N Chapita 293-28
43-047-50470	CWU 1455-21
43-047-50543	CWU 1447-19
43-047-50540	CWU 1443-19
43-047-50541	CWU 1444-19
43-047-50544	CWU 1437-19
43-047-50556	CWU 1421-34
43-047-50559	SCW 30-03
43-047-50561	SCW 28-03
43-047-50582	SCW 26-03
43-047-50586	CWU 1394-03
43-047-50587	CWU 1404-34
43-047-50588	CWU 1439-19
43-047-50614	CWU 1452-29
43-047-50615	CWU 1454-29
43-047-50617	CWU 1457-29
43-047-50618	CWU 1458-29
43-047-50622	CWU 1445-19
43-047-50666	EC 114-05
43-047-50667	HOSS 124-34
43-047-50676	CWU 1469-34
43-047-50677	EC 111-05
43-047-51121	HOSS 52-29
43-047-51173	CWU 1536-25D
43-047-51174	CWU 1537-25D
43-047-51175	CWU 1538-25D
43-047-51176	CWU 1539-25D
43-047-51177	CWU 1540-25D